

## LUBRICATING EQUIPMENT

### STANDARD LEVER-ACTION GREASE GUN

- Uses standard 14 oz. grease cartridge or can be bulk filled
- Rugged electro-static epoxy coated finish resists corrosion
- Deep knurling for non-slip grip
- Heavy duty steel barrel for long life
- Machine steel head protects hardened steel plunger
- V-handle posi-lock follower rod for sure grip and easy filling in any position
- Ideal for home, farm, maintenance and shop use
- Complete with 6" rigid pipe extension and coupler
- Delivers 1 gm / stroke or 1 oz / 28 strokes
- Produces up to 6000 psi

PROD. NO. MOD. NO.

350151 JLGG-14S Standard Duty




### PREMIUM LEVER-ACTION GREASE GUN

- A premium, heavy duty grease gun built tough for the professional, industrial markets
- Added filler nipple allows three way loading; bulk, filler pump or standard 14 oz. cartridge
- Air bleeder valve easily purges unwanted air
- Variable stroke for working in confined areas
- Rugged electro-static epoxy coated finish resists corrosion
- Deep knurling for non-slip grip
- Heavy duty steel barrel for long life
- Die cast head protects hardened steel plunger
- T-handle posi-lock follower rod for sure grip and easy filling in any position
- Comfortable sure grip rubber handle makes pumping easy and convenient
- Complete with 6" rigid extension, 12" flexible hose, and heavy duty coupler
- A must for heavy maintenance, industrial, automotive and farm use
- Delivers 1 gm / stroke or 1 oz / 28 strokes
- Produces up to 10000 psi

PROD. NO. MOD. NO.

350152 JLGG-14HD Professional Duty

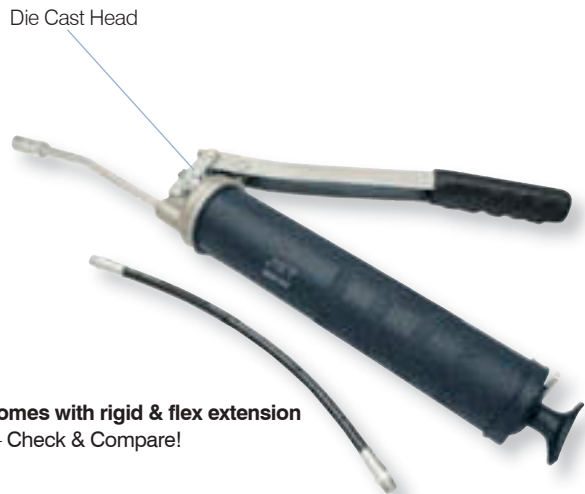


### HEAVY DUTY PISTOL GRIP GREASE GUN

- Pistol grip design offers convenient one-handed operation
- Die cast head protects hardened steel plunger
- Uses standard 14 oz. grease cartridge or can be bulk filled
- Rugged electro-static epoxy coated finish resists corrosion
- Deep knurling for non-slip grip
- T-handle posi-lock follower rod for sure grip and easy filling in any position
- Includes 4" rigid pipe extension, 18" flexible hose and heavy duty coupler
- Delivers 0.40 gm / stroke or 0.60 oz / 40 strokes
- Produces up to 5000 psi

PROD. NO. MOD. NO.

350155 JPGG-14HD Professional Duty

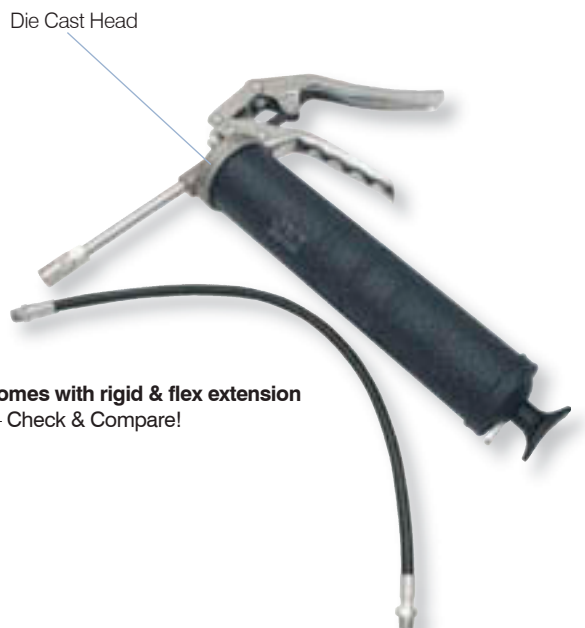

## LUBRICATING EQUIPMENT

### PISTOL GRIP AIR GREASE GUN

- A premium severe duty air powered grease gun for the most demanding professional user
- Intermittent action delivers one shot of grease for every pull of the trigger
- Added filler nipple allows 3 way loading; bulk, filler pump, or standard 14oz. cartridge
- Heavy duty die cast aluminum head
- Precision honed barrel for fast action
- Air pressure 40 - 120 psi at 1 cfm or greater
- T-Handle posi-lock follower rod for sure grip and easy filling in any position
- Complete with male quick coupler air fitting
- Produces up to 4800 psi

PROD. NO. MOD. NO.

350161 JAGG-14P Professional Duty



### MINI PISTOL GREASE GUN

- Convenient pull type trigger for easy one hand operation
- Die cast head
- Textured zinc plated finish for non slip grip
- Uses standard 3oz. grease cartridges or can be bulk filled
- T-handle posi-lock follower rod for sure grip
- Complete with 4" rigid pipe extension and professional coupler
- Produces up to 3500 psi
- Delivers 0.40gm/stroke or 0.60oz/40 strokes

PROD. NO. MOD. NO.

350171 JMPG-16 Professional Duty



### MINI PUSH TYPE GREASE GUN

- Perfect tool box companion for lubrication of tools on the job
- Universal connector fits all standard fittings
- Comes pre loaded with NLGI Grade 2 grease
- Can be re-filled
- Transparent barrel provides clear view of remaining grease
- Sealed design to prevent leakage

PROD. NO. MOD. NO.

350173 JPTG-1



### SUCTION GUN

- Rugged 18 oz. capacity suction gun for draining and filling differentials, clutches, and transmissions
- Needs no priming
- Heavy duty steel barrel for long life
- Electro-static epoxy coated finish resists corrosion
- Deep knurling for non-slip gripping
- T-handle posi-lock follower rod for sure grip
- Complete with flexible vinyl hose
- For use with any non-corrosive lubricants

PROD. NO. MOD. NO.

350157 JSGG-18 Professional Duty



## LUBRICATING EQUIPMENT



**NEW**

### HIGH PRESSURE GREASE HOSES

- Heavy duty high pressure (11,600 P.S.I. burst pressure) grease hoses for all makes of hand grease guns
- Working pressure 3,500 P.S.I.
- Replacement whip hoses
- Polyamide inner tube with polyetherane outer tube, reinforced with highly tear resistant polyester

PROD. NO.	MOD. NO.	Length	Style	Thread
350181	JFH-12	12"	Flexible	1/8" N.P.T.
350182	JFH-18	18"	Flexible	1/8" N.P.T.
<b>NEW</b> <b>NEW</b> 350201*	JFH-12SP	12"	Flexible	1/8" N.P.T.
350202*	JFH-18SP	18"	Flexible	1/8" N.P.T.

\*Fitted with heavy duty spring for added safety, strength and life



### GREASE GUN HOLDER

- Conveniently mounts any 2-1/4" O.D. grease gun to almost any surface

PROD. NO.	MOD. NO.
350185	JGGH-1



All models complete with both flex and rigid spouts — Check & Compare!

### BRASS PUMP OIL CANS

- Industrial quality
- Brass pump
- Electro-static, corrosion resistant epoxy coating
- Complete with flex hose and rigid spout — Check and Compare!

PROD. NO.	MOD. NO.	Capacity
<b>NEW</b> 350121	JOC-180	6 oz / 180 ml
350122	JOC-300	10 oz / 300 ml
350124	JOC-500	16 oz / 500 ml
350125	JOC-700	24 oz / 700 ml

**NEW**

350121



**NEW**

### ALUMINUM DRUM WRENCH

- Designed to fit perfectly onto most 2" and 3/4" drum plugs
- Made of cast aluminum for strength and safety
- Will not cause sparks
- Hardened and tempered

PROD. NO.	MOD. NO.
350214	JADW-1

# LUBRICATING EQUIPMENT

## LEVER-ACTION BUCKET PUMP

- Zinc die cast head and adjustable flange
- 18" zinc plated pump body
- Epoxy coated, corrosion resistant 12" drum cover
- Fits 25 - 50 lb / 5 gallon pails
- Suitable for transfer of transmission, differential, and heavier oils
- Complete with 48" fuel resistant soft PVC hose with nozzle
- Delivers 16 oz / stroke

PROD. NO. MOD. NO.

350106 JLBP-02 Professional Duty



350106

## GREASE FILLER PUMP

- Zinc die cast head and adjusting flange
- 18" zinc plated pump body
- Epoxy coated, corrosion resistant 12" drum cover
- All steel foot valve
- Fits 25 - 50 lb / 5 gallon pails
- Designed to load bulk or combination grease guns
- Delivers 4.2 cubic inches per stroke
- Suitable for use with light and medium density grease

PROD. NO. MOD. NO.

350158 JGFP-03 Professional Duty



350158

## DRUM DOLLIES

- Heavy gauge steel for professional use
- Powder coated finish
- 5 and 16 gallon models with adjustable clamp bolt
- 16 & 55 gallon models complete with cast iron castors — Check and Compare!

PROD. NO.	MOD. NO.	Application	Wheels	Load Limit
351003	JDD-5	5 gallon drums	Resin	200 lbs
351004	JDD-16	16 gallon drums	Extra Heavy Duty Cast Iron	200 lbs
351005	JDD-55	55 gallon drums	Extra Heavy Duty Cast Iron	450 lbs

## DRUM CRADLE

- Tilting drum cradle moves, rotates, tips, and stores 55 gallon drums with ease
- Self storing lever bar
- Powder coated finish
- Flat packed for easy shipping

PROD. NO.	MOD. NO.	Application	Wheels	Load Limit
351011	JDC-55	55 gallon drums	2-1/2" Non Sparking	600 lbs



Cast iron castors  
— Check and Compare!



## LUBRICATING EQUIPMENT

### QUICK CHANGE COUPLER SET

- Quick change feature snaps directly onto jaw type couplers – no need to remove hydraulic coupler to change accessories
- Instantly converts jaw type couplers for fine line greasing for access to confined areas
- Protective sleeve secures connection
- Ideal for applications where fittings are found in various limited access areas
- For hand operated grease guns
- Contains one each: recessed lube adaptor (350208), angle lube adaptor (350209), needle nose adaptor (350210), right angle coupler (350211), seal off dispenser (350212), grease injector needle (350206), 12" flexible hose (350201), terylene pouch

PROD. NO. MOD. NO.

350213 JQCC-7S

### QUICK CHANGE ACCESSORIES

#### RECESSED LUBE ADAPTOR

- 4" length, tip diameter 0.22"
- For push on greasing of fittings where obstruction will not allow use of regular coupler

PROD. NO. MOD. NO.

350208 JRLA-1

#### 90° ANGLE LUBE ADAPTOR

PROD. NO. MOD. NO.

350209 JALA-1

#### NEEDLE NOSE ADAPTOR

- 1-1/2" needle length, diameter 0.156"

PROD. NO. MOD. NO.

350210 JNND-2

#### RIGHT ANGLE COUPLER

- Working pressure 1000 psi
- Particularly useful in low height applications
- Polyurethane seal fits perfectly on grease fitting

PROD. NO. MOD. NO.

350211 JRAC-2

#### SEAL OFF DISPENSER


- Used for lubricating cars with grease plugs
- Oil and grease resistant rubber tip

PROD. NO. MOD. NO.

350212 JSOD-1



**NEW**



350208

**NEW**



350209

**NEW**



350210

**NEW**



350211

**NEW**



350212

**NEW**



# LUBRICATING EQUIPMENT

## COUPLERS / ADAPTORS

- For hand operated grease guns
- Professional industrial quality

### 3 JAW PROFESSIONAL COUPLER

- Hardened body withstands high pressure without deformation
- Working pressure 6000 psi
- 1/8" NPT threads

PROD. NO. MOD. NO.

350203 JPDC-3

**NEW**



### RIGHT ANGLE COUPLER

- Unique design for greasing fittings in hard to reach areas
- Particularly useful in low height applications
- Polyurethane seal fits perfectly on grease fitting
- Working pressure 1000 psi
- 1/8" NPT threads

PROD. NO. MOD. NO.

350204 JRAC-1

**NEW**



### NEEDLE NOSE DISPENSER

- For dispensing fine line of grease
- Allows contact with flush or hard to reach fittings in inaccessible areas
- 1-1/2" needle length, diameter 0.156"
- 1/8" NPT threads

PROD. NO. MOD. NO.

350205 JNND-1

**NEW**



### GREASE INJECTOR NEEDLE

- Lubricates in extremely tight places including u-joints and sealed bearings
- Fits directly on jaw type couplers
- 18 gauge Stainless steel
- 1-1/2" long
- With protective plastic holder

PROD. NO. MOD. NO.

350206 JGIN-15

**NEW**



### SWIVEL GREASE COUPLER

- Built in 360° swivel locks in eight positions
- Working pressure 7000 psi
- 1/8" NPT threads
- Fully hardened 3 jaw construction

PROD. NO. MOD. NO.

350207 JSGC-360

**NEW**



## LUBRICATING EQUIPMENT



Straight – 350251 / 350254

**NEW**


45° – 350252 / 350255

**NEW**


90° – 350253 / 350256

**NEW**


8 PC – 350257 / 350258

**NEW**


350259 / 350260

### PROFESSIONAL GREASE FITTINGS

- Conforms to S.A.E., DIN, BS, and JIS standards
- EN-1A steel with zinc plating
- Heat treated to a minimum of HRC83
- Available in 10 piece packs of single types, 8 piece packs assorted, and 80 piece assortments

PROD.	MOD. NO.	Type	PC	Thread	Hex Size
350251	JGF-142800	Straight Fittings	10	1/4" – 28 S.A.E.	5/16"
350252	JGF-142845	45° Fittings	10	1/4" – 28 S.A.E.	3/8"
350253	JGF-142890	90° Fittings	10	1/4" – 28 S.A.E.	3/8"
350254	JGF-182700	Straight Fittings	10	1/8" – 27 NPT	7/16"
350255	JGF-182745	45° Fittings	10	1/8" – 27 NPT	7/16"
350256	JGF-182790	90° Fittings	10	1/8" – 27 NPT	7/16"

### S.A.E./METRIC GREASE FITTINGS

PROD.	MOD.	Type	PC	Contents
350257	JGF-8S	S.A.E.	8	2 each: 1/4" – 28 Straight, 1/8" – 27 Straight, 1/8" – 27 45°, 1/8" – 27 90°
350258	JGF-8M	Metric	8	2 each: M6 x 1 Straight, M6 x 1 45°, M6 x 90°, M8 x 1
350259	JGF-80S	S.A.E.	80	15 x 1/4" – 28 Straight, 10 x 1/4" – 28 45°, 10 x 1/4" – 28 90°, 25 x 1/8" – 27 Straight, 10 x 1/8" – 27 45°, 10 x 1/8" – 27 90°
350260	JGF-80M	Metric	80	20 x M6 x 1 Straight, 10 x M6 x 1 90°, 15 x M8 x 1 Straight, 10 x M8 x 1 90°, 15 x M10 x 1 Straight, 10 x M10 x 1 90°

### 4 WAY FITTING TOOLS

- Handy multi purpose fitting tools
- Wrench, tap, and extractor in one
- Removes worn and broken fittings, re-taps threaded holes, installs new fittings
- Works with straight and angled fittings

### FOR 1/4" - 28 S.A.E. AND 6MM FITTINGS

- Tap repairs 1/4"-28 S.A.E. threaded holes
- Wrench removes and installs 5/16" and 3/8" hex fittings

PROD. NO. MOD. NO.

350261 JGFT-14

### FOR 1/8" - 27 NPT FITTINGS

- Tap repairs 1/8"-27 NPT threaded holes
- Wrench removes and installs 7/16" and 3/8" hex fittings

PROD. NO. MOD. NO.

350262 JGFT-18

**NEW**


350261

**NEW**


350262

## FLUID TRANSFER EQUIPMENT

### LEVER-ACTION BARREL PUMP

- Rugged epoxy coated pump assembly
- Tough all steel foot valve and piston valve
- Fits 15 - 55 gallon drums
- Suitable for use with all oil based fluids
- Complete with 2-piece draw tube
- Delivers 10 oz / stroke

PROD. NO. MOD. NO.

350105 JLP-01 Professional Duty

### HEAVY DUTY ROTARY BARREL PUMP

- Heavy duty cast iron pump head
- Pumps up to 1 gallon per 18 revolutions
- Transfers petroleum based non-corrosive fluids such as gasoline, kerosene, and diesel
- 3-piece rigid draw tube conveniently fits in package
- Ideal for automotive, industrial, commercial and farm use
- Pumps in either direction after a few reverse turns of the handle

PROD. NO. MOD. NO.

350103 HRP-25 Professional Duty

### DIAPHRAGM PUMP

- Suitable for gasoline and diesel fuels
- Delivers 1 litre per cycle
- Fits 15 - 55 gallon drums
- High volume double action pump delivers on both strokes for fast fuelling
- Diecast aluminum construction
- Stainless steel piston and fuel resistant diaphragm
- Extra heavy duty steel handle with security locking latch
- Complete with 2" bung adaptor, 8' discharge hose and telescoping suction tube

PROD. NO. MOD. NO.

350107 JDDP-1000 Professional Duty

### POLYPROPYLENE CHEMICAL PUMP

- Suitable for use with antifreeze, detergents, windshield washer fluid, mild acids and glycerine
- Delivers 14 oz. per stroke
- Fits 15 - 55 gallon drums
- Polypropylene pump with steel plunger rod and Viton seals
- Not recommended for water, strong acids, lacquers, acetone and gasoline

PROD. NO. MOD. NO.

350108 JPCP-14 Professional Duty

### NYLON CHEMICAL PUMP

- Excellent for use with lacquer thinners, acetone, MEK, antifreeze, detergents, windshield washer fluids, mild acids, weed killer, water and glycerine
- Delivers 14 oz. per stroke
- Fits 15 - 55 gallon drums
- Nylon pump with stainless steel plunger rod and Teflon seals
- Not recommended for strong acids or gasoline

PROD. NO. MOD. NO.

350109 JNCP-14 Professional Duty





## SPRING REWIND HOSE REELS

### HEAVY DUTY

- All body and frame components made of superior heavy gauge steel for professional applications/installations — **Check & Compare!**
- All metal parts powder coated for corrosion free performance
- Reinforced L-shaped base
- Professional super duty spring mechanism for long life — **Check & Compare!**
- Nine position, adjustable guide arm
- Heavy duty four direction, non snag rollers — **Check & Compare!**
- Anti lock-out ratchet mechanism prevents reel from locking up when hose is fully extended
- Heavy duty American made, solid brass swivel fitting — **Check & Compare!**
- Can be wall, floor or ceiling mounted

**Standard Accessories:** Hose and fittings

#### NOTE:

There are many similar looking air/water rewind hose reels in the market. However, these industrial quality JET reels offer heavier gauge body and frame steel components, superior American made air swivel fittings, an extra heavy duty spring mechanism (tested to 30,000 cycles) and a superior quality four direction snag roller system — **Check & Compare!**

MOD. NO.	AW3825	AW3850	AW1250
PROD. NO.	391721	391722	391726

Hose Diameter (I.D.)	3/8"	3/8"	1/2"
Hose Length	25'	50'	50'
Hose Inlet/Outlet (N.P.T.)	3/8"	3/8"	1/2"
Max. Hose Pressure (P.S.I.)	300	300	300
Unit Weight (Lb.)	29	54	59
Intended Use	Air/Water	Air/Water	Air/Water

MOD. NO.	OA1450	O1250	G1450
PROD. NO.	391746	391747	391731

Hose Diameter (I.D.)	1/4"	1/2"	1/4"
Hose Length	50'	50'	50'
Hose Inlet/Outlet (N.P.T.)	1/4"	1/2"	1/4"
Max. Hose Pressure (P.S.I.)	300	2,000	5,000
Unit Weight (Lb.)	53	64	53
Intended Use	Oxy/ Acetylene	Oil	Grease

#### NOTE:

See Air Tools Catalogue for hose reels accessories.

## HAND CRANK HOSE REELS

- Provides the ideal method for safe & economic handling of air and water hose
- Heavy duty steel drum and frame construction
- Corrosion resistant powder coating
- Spring tensioned brake prevents free wheeling
- Solid brass swivel and fittings
- Model HC200 features brass and stainless steel fluid path
- Mount on floor, bench or service truck

MOD. NO.	HC100	HC200
PROD. NO.	391741	391742

Hose Diameter (I.D.)	3/8"	3/8"
Maximum Hose Length	100'	100'
Hose Inlet/Outlet (N.P.T.)	3/8"	3/8"
Max. Hose Pressure (P.S.I.)	300	300
Unit Weight (Lb.)	13	14
Intended Use	Air/Water	Air/Water

(Note: Hose not included)

