DUSTRIAL STEEL SHELV

MAIN FFATURES:

- Standard colour is light grey
- No-bolt shelf design saves up to 80% of installation time
- Employs an innovative shelf clip, which slips into a slotted "T" post
- Shelves are 18-gauge steel with . a 630 lbs. cap. (36" W) and 315 lbs. cap. (48" W) for evenly distributed loads
- Shelves come in various sizes with a height of 1"
- Extra shelves may be added to standard units to increase storage capacities
- Shelves are adjustable every 2"
- All units shipped knocked down

OPEN TYPE SHELVING

- Provides strong and economical storage systems for any plant, warehouse or office
- Starter units include number of shelves required for application, 4 "T" posts, 2 pairs of side sway braces and 1 pair of back sway braces
- Same for add-on units, except only 1 pair of side sway braces, and 2 posts are required

No.	Height	Wt. Ibs.
POSTS		
RK550	8'4"	10.0
RK551	6'4"	8.0
RK548	7'4"	9.0
BRACES		
RK472	Back braces (pr.)	4.0
RC453	Gussets (pr.)	1.0
RK565	Side braces (pr.)	2.0



Model

CLOSED TYP SHELVING

Starter units include number of shelves required for application, 2 end panels, 1 back panel and 1 base plate

New Colour! Now in

Light Grey

Same for add-on units, except only 1 end panel is required

Model	Dimensions	Wt.			
No.	WxH	lbs.			
BACK PANELS					
RK470	48" x 6'4"	25.5			
RK468	48" x 7'4"	29.5			
RK471	36" x 6'4"	19.0			
RK469	36" x 7'4"	22.0			
SIDE PA	ANELS				
RK522	12" x 6'4"	21.0			
RK523	12" x 7'4"	23.5			
RK530	24" x 6'4"	27.0			
RK531	24" x 7'4"	31.0			
RK537	18" x 6'4"	24.0			
RK538	18" x 7'4"	27.0			
DOORS					
RK575	36" x 6'4"	43.0			
RK576	36" x 7'4"	50.0			
For shelves	& other component	ts see below			

Wt

lbs.

0.1

To order open or closed type shelving, determine the height, the number of shelves, and the shelf dimensions that suit your application. If multiple units are to be connected, order one starter unit, and add-on units for the balance. If a larger number of shelves are required than the units shown, order extra shelves. Shelves may be added at 2" intervals. Styles available are unlimited, please contact us.

STANDARD COMPONENTS

FOR BOTH OPEN AND CLOSED SHELVING



RC136 With 72 Shelf Boxes RC486

Model	Shelf Size			Wt.
No.	W"	х	D"	lbs.
SHELVES				
RK552	36	Х	12	8
RK558	36	X	18	12
RK561	36	X	24	15
RK554	48	х	12	11
RK560	48	X	18	15
RK563	48	X	24	19
SHELF DIV	IDER	S		
RK491	12	х	12	1.25
RK493	18	X	12	2.0
RK494	24	X	12	2.75
RK503	12	х	6	.50
RK505	18	X	6	1.0
RK506	24	Х	6	1.5

No.		W" x	Н"			lbs.
BIN FRO	ONTS					
RK475		36 x	1			1.75
RK477		36 x	2			2.0
RK479		36 x	3			2.5
BASE P	LATES					
RK483 RK485		36 x 48 x				2.0 2.5
SHELF	BOXES					
Model		Di	mensio	ns		Wt.
No.	W"	Х	D"	Х	H"	lbs.
RK566	5 5/8	Х	12	Х	2 3/4	2.5
RK569	5 5/8	Х	18	Х	2 3/4	3.5
RK570	5 5/8	Х	12	Х	4 3/4	3.5
RK573	5 5/8	Х	18	Х	4 3/4	4.5
RK574	11	Х	18	Х	4 3/4	5.0
EXTRA	DIVIDE	RS				
Model	Dir	nensi	ons			Wt.

W" x H"

5 5/8 x 2 3/4

Shelf Size

INDUSTRIAL STEEL SHELVING UNITS - 48" WIDE X 7'4" HIGH



Contains: 3 Bays 48" Wide x 28" High

Add-on Unit

RK284

RK286

RK288

Starter Unit

RK285

RK287

RK289

Depth"

12

18

24

Note: Individual bay heights are approximate.



Contains: 6 Bays 48" Wide x 14" High


Depth"	Starter Unit	Add-on Uni
12	RK297	RK296
18	RK299	RK298
24	RK301	RK300



No.

RC508

Depth"	Starter Unit	Add-on Unit
12	RK291	RK290
18	RK293	RK292
24	RK295	RK294




Contains: 3 Bays 48" Wide x 28" High Contains: 6 Bays 48" Wide x 14" High

Depth"	Starter Unit	Add-on Unit
12	RK303	RK302
18	RK305	RK304
24	RK307	RK306


18855E **B30**

STEEL SHELVING UNITS - 36"W X 6'4"H









Contains: 3 Bays 36" Wide x 24" High Contains: 6 Bays 36" Wide x 12" High Contains: 9 Bays 36" Wide x 8" High Contains: 12 Bays 36" Wide x 6" High

Depth"	Starter Unit	Add-On Unit
12	RK205	RK204
18	RK207	RK206
24	RK209	RK208

Depth"	Starter Unit	Add-On Unit
12	RK217	RK216
18	RK219	RK218
24	RK221	RK220


Depth"	Starter Unit	Add-On Unit
12	RK229	RK228
18	RK231	RK230
24	RK233	RK232

Depth"	Starter Unit	Add-On Unit
12	RK241	RK240
18	RK243	RK242
24	RK245	RK244









Contains: 3 Bays 36" Wide x 24" High Contains: 6 Bays 36" Wide x 12" High Contains: 9 Bays 36" Wide x 8" High


Contains: 12 Bays 36" Wide x 6" High


Depth"	Starter Unit	Add-On Unit
12	RK211	RK210
18	RK213	RK212
24	RK215	RK214

Depth"	Starter Unit	Add-On Unit
12	RK223	RK222
18	RK225	RK224
24	RK227	RK226


Depth"	Starter Unit	Add-On Unit
12	RK235	RK234
18	RK237	RK236
24	RK239	RK238


Depth"	Starter Unit	Add-On Unit
12	RK247	RK246
18	RK249	RK248
24	RK251	RK250











Contains: 3 Bays 36" Wide x 24" High Complete with Locking, Swinging Doors

Contains:	b bays 36 Wide x 12 Hig
	Complete with Locking,
	Swinging Doors

	Canada a Haria Add On Hari	
	Swinging Doors	
	Complete with Locking,	
	6 Bays 36" Wide x 8" High	h
1113.	Z Days 30 Wide X 12 Til	J١

6 Bays 36" Wide x 12" High Complete with Locking, Swinging Doors	Contains:	,		Contains:		0,
Startor Unit Add On Unit	Donth"	Startor Unit	Add On Unit	Donth"	Ctartor Unit	Add On Unit

Depth"	Starter Unit	Add-On Unit
12	RK849	RK852
18	RK850	RK853
24	RK851	RK854

D	epth"	Starter Unit	Add-On Uni
12		RK855	RK858
18	3	RK856	RK859
24	ļ	RK857	RK860

Depth"	Starter Unit	Add-On Unit
12	RK957	RK952
18	RK954	RK953
24	RK956	RK955

Depth"	Starter Unit	Add-On Unit
12	RK958	RK960
18	RK961	RK959
24	RK963	RK962

Note: Individual bay heights are approximate.

STEEL SHELVING UNITS - 36"W X 6'4"H



Contains: 2 Bays 36" W x 24" H 4 Compartments 18" W x 12" H

Starter Unit

Add-On Unit

Depth"



Contains: 4 Compartments 18" W x 12" H 9 Compartments 12" W x 12" H 1 Bay 36" W x 12" H




Contains: 18 Compartments 12" W x 12" H



Contains: 72 Compartments 6" W x 6" H

12	RK253	RK252
18	RK255	RK254
24	RK257	RK256



Starter Unit	Add-On Unit
RK265	RK264
RK267	RK266
RK269	RK268
	RK265 RK267

Depth"	Starter Unit	Add-On Unit
12	RK271	RK270
18	RK273	RK272
24	RK275	RK274



Contains: 1 Bay 36" W x 12" H
6 Compartments
18" W x 12" H
1 Bay 36" W x 24" H
Complete with Locking,
Swinging Doors

: 18 Compartments 6" W x 6" H complete with 1" Bin Fronts 30 Metal Shelf Boxes (drawers) 5 5/8" W x 4 3/4" H 6 Compartments 12" W x 2" H complete with 3" Bin Fronts



18 Compartments 12" W x 12" H Complete with Locking, Swinging Doors

_	1
	00000
	디디디디디디

ontains: 72 Metal Shelf Boxes (drawers) 5 5/8" Wx 4 3/4" H


Depth"	Starter Unit	Add-On Unit
12	RK861	RK864
18	RK862	RK865
24	RK863	RK866

Depth"	Starter Unit	Add-On Unit
12	RK867	RK869
18	RK868	RK870

Depth"	Starter Unit	Add-On Unit
12	RK871	RK874
18	RK872	RK875
24	RK873	RK876

Contains:

Depth"	Starter Unit	Add-On Unit
12	RK877	RK879
18	RK878	RK880



Contains: 108 Metal Shelf Boxes (drawers) 5 5/8" W x 2 3/4" H

	Ţ	
]	Ĺ	Ŀ
	Ī	C
]	Ţ	l'
Ţ	ר	Ī
j	Ţ	Ē
]	j	Ĺ
Ţ	Ĭ	Ĺ
1	12	Ē
		Ľ
	Ĺ	Ľ
	-,-	-

Contains: 36 Metal Shelf Boxes (drawers) 11" W x 4 3/4" H

1			
		<u>11 11</u>	ŪŪ.
		==	ΞŪ
		-	
	הוה	נוני	되고
	<u> </u>		
			- [
	H	Ū	
	-1.		· ·
\sim			

Contains: 42 Metal Shelf Boxes (drawers) 5 5/8" W x 4 3/4" H 15 Metal Shelf Boxes (drawers) 11" W x 4 3/4" H

\exists	111
\pm	
Ħ	
	ΠŢ
렆	並
\Box	

Contains: 72 Compartments 6" W x 6" H Complete with 1" Bin-Fronts

Depth"	Starter Unit	Add-On Unit
12	RK881	RK883
18	RK882	RK884

Unit
7
3


Depth"	Starter Unit	Add-On Unit
12	RK889	RK891
18	RK890	RK892

Depth"	Starter Unit	Add-On Unit
12	RK279	RK278
18	RK281	RK280
24	RK283	RK282

Note: Individual bay heights are approximate.

B32

STEEL SHELVING UNITS - 36"W X 7'4"H



Contains: 3 Bays 36" Wide x 28" High Depth" Starter Unit Add-On Unit

RK308

RK310

RK312

RK309

RK311

RK313

12 18 24

Contains: 6 Bays 36" Wide x 14" High

Starter Unit

RK333

RK335 **RK337**

Depth"

Depth"

12

18

12 18

24

Contains: 7 Bays 36" Wide x 12" High

Contains: 14 Bays 36" Wide x 6" High

Depth
12
18
24

Add-On Unit

RK338

RK340

Depth"

12

18

24

Depth"	Starter Unit	Add-On Unit
12	RK321	RK320
18	RK323	RK322
24	RK325	RK324

Depth"	Starter Unit	Add-On Unit
12	RK345	RK344
18	RK347	RK346
24	RK349	RK348



Contains: 3 Bays 36" Wide x 28"High

Contains: 6 Bays 36" Wide x 14" High

Starter Unit

RK339

RK341



Contains: 7 Bays 36" Wide x 12" High

Add-On Unit

RK326

RK328

RK330

Depth"

12

18

24

Starter Unit

RK327

RK329

RK331



RK351

RK353

RK355

RK350

RK352

RK354

Depth"	Starter Unit	Add-On Unit
12	RK315	RK314
18	RK317	RK316
24	RK319	RK318



Contains: 6 Bays 36" Wide x 14" High Complete with Locking, Swinging Doors

lì	<u> </u>
	1

7 Bays 36" Wide x 12" High Contains: Complete with Locking, Swinging Doors

	4

Contains: 8 Bays 36" Wide x 6" High 3 Bays 36" Wide x 12" High Complete with Locking, Swinging Doors

	Locking, Swinging Door		
Depth"	Starter Unit	Add-On Unit	
12	RK893	RK896	
18	RK894	RK897	
24	RK895	RK898	

Complete with

Contains: 3 Bays 36" Wide x

28" High

Depth"	Starter Unit	Add-On Unit
12	RK899	RK902
18	RK900	RK903
24	RK989	RK904

Depth"	Starter Unit	Add-On Unit
12	RK991	RK990
18	RK993	RK992
24	RL020	RL021

Starter Unit Add-On Unit **RK996 RK995** 18 **RK998 RK997 RK999**

Note: Individual bay heights are approximate.

STEEL SHELVING UNITS - 36"W X 7'4"H




Contains: 2 Bays 36" W x 28" H 4 Compartments 18" W x 14" H

Depth"	Starter Unit	Add-On Unit
12	RK357	RK356
18	RK359	RK358
24	RK361	RK360




Contains: 4 Compartments 18" Wx 14" H 9 Compartments 12" W x 14" H 1 Bay 36" Wide x 14" High

Depth"	Starter Unit	Add-On Unit
12	RK363	RK362
18	RK365	RK364
24	RK367	RK366




Contains: 21 Compartments 12" W x 12" H

Depth"	Starter Unit	Add-On Unit
12	RK369	RK368
18	RK371	RK370
24	RK373	RK372




Contains: 84 Compartments 6" W x 6" H

Depth"	Starter Unit	Add-On Uni
12	RK375	RK374
18	RK377	RK376
24	RK379	RK378




Contains:1 Bay 36" W x 14" H
6 Compartments 18" W x 14" H
1 Bay 36" W x 28" H
Complete with Locking,
Swinging Doors

Depth"	Starter Unit	Add-On Unit
12	RK911	RK914
18	RK912	RK915
24	RK913	RK916



Contains:9 Compartments 12" W, 12" H complete with 3" Compartments fronts 18 Compartments 6" W x 6" H complete with 1" Compartment fronts 30 Metal Shelf Boxes (drawers) 5 5/8" W x 4 3/4" H

Depth"	Starter Unit	Add-On Unit
12	RK917	RK919
18	RK918	RK920




Contains: 21 Compartments 12" W x 12" H Complete with Locking, Swinging Doors

		_
T I	7 2 2 2 2	
		L
	J J J J J	Ħ
	J J J J J	Ħ
		Ė
		Ħ
		目
		己
		己
		回
		回
		靣
<u> </u>		=
\sim		
. 0484	-4-I Ch - If D	

Contains: 84 Metal Shelf Boxes (drawers) 5 5/8" W x 4 3/4" H

Depth"	Starter Unit	Add-On Unit
12	RK921	RK924
18	RK922	RK925
24	RK923	RK926

Depth"	Starter Unit	Add-On Unit
12	RK927	RK929
18	RK928	RK930



Contains: 126 Metal Shelf Boxes (drawers) 5 5/8" W x 2 3/4" H


Depth"	Starter Unit	Add-On Unit
12	RK931	RK933
18	RK932	RK934

18 RK932 RK934




Contains: 42 Metal Shelf Boxes (drawers) 11" W x 4 3/4" H

Depth"	Starter Unit	Add-On Unit
12	RK381	RK380
18	RK936	RK938



Contains: 54 Metal Shelf Boxes (drawers) 5 5/8" W x 4 3/4" H 15 Metal Shelf Boxes (drawers) 11" W x 4 3/4" H

Depth"	Starter Unit	Add-On Unit
12	RK939	RK941
18	RK940	RK942




Contains: 84 Compartments 6" W x 6" H Complete with 1" Compartment Fronts

Depth"	Starter Unit	Add-On Unit
12	RK383	RK382
18	RK385	RK384
24	RK387	RK386

Note: Individual bay heights are approximate.

STEEL SHELVING UNITS - 36" W X 8'4" H




Open Type
Contains: 6 Bays 36" W x 16" H

Depth"	Starter Unit	Add-On Unit
12	RK389	RK388
18	RK391	RK390
24	RK393	RK392




Open Type Contains: 8 Bays 36" W x 12" H

Depth"	Starter Unit	Add-On Unit
12	RK401	RK400
18	RK403	RK402
24	RK405	RK404



Open Type Contains: 12 Bays 36" W x 8" H

Depth"	Starter Unit	Add-On Unit
12	RK413	RK412
18	RK415	RK414
24	RK417	RK416



Open Type
Contains: 4 Bays 36" W x 24" H

Depth"	Starter Unit	Add-On Unit
12	RK425	RK424
18	RK427	RK426
24	RK429	RK428



Contains: 6 Bays 36" W x 16" H

Depth"	Starter Unit	Add-On Unit
12	RK395	RK394
18	RK397	RK396
24	RK399	RK398



Contains: 8 Bays 36" W x 12" H

Depth"	Starter Unit	Add-On Unit
12	RK407	RK406
18	RK409	RK408
24	RK411	RK410



Contains: 12 Bays 36" W x 12" H

Depth"	Starter Unit	Add-On Unit
12	RK419	RK418
18	RK421	RK420
24	RK423	RK422




Contains: 4 Bays 36" W x 24" H

Depth"	Starter Unit	Add-Un Unit
12	RK431	RK430
18	RK433	RK432
24	RK435	RK434




Contains: 1 Bay 36" W x 16" H 12 Compartments 12" W x 14" H 1 Bay 36" W x 24" H

Depth"	Starter Unit	Add-On Unit
12	RK437	RK436
18	RK439	RK438
24	RK441	RK440



Contains: 24 Compartments 12" Wx 12" H

Depth"	Starter Unit	Add-On Unit
12	RK443	RK442
18	RK445	RK444
24	RK447	RK446



Contains: 48 Compartments 9" W x 8" H

Depth"	Starter Unit	Add-On Unit
12	RK449	RK448
18	RK451	RK450
24	RK453	RK452



Contains: 1 Bay 36" W x 12" H 12 Compartments 18" W x 14" H

Depth"	Starter Unit	Add-On Unit
12	RK455	RK454
18	RK457	RK456
24	RK459	RK458

 $\textbf{Note:} \ \textbf{Individual bay heights are approximate}.$

TTED ANGLE SHELVI


SLOTTED ANGLE SHELVING

- Ideal for shelving and storage systems, work benches, tubing storage, protective framing around machinery, platforms around assembly projects, etc.
- Choose from the various components available, or pre-configured shelf units • Unique boltless clip design allows for adjustability of shelves easily and effortlessly
- To ensure stability, it is recommended that 3 shelf levels are bolted when using boltless clips

benoma nelson







SLOTTED ANGLE SHELVING

	6 Shelves/72" Post			es/84" Post	8 Shelves/96" Post		
Size	Mod	el No.	Mod	lel No.	Model No.		
W" x L"	Open	Closed	Open	Closed	Open	Closed	
12 x 36	RH701	RH774	RH707	RH780	RH713	RH786	
18 x 36	RH702	RH775	RH708	RH781	RH714	RH787	
24 x 36	RH703	RH776	RH709	RH782	RH715	RH788	
12 x 48	RH704	RH777	RH710	RH783	RH716	RH789	
18 x 48	RH705	RH778	RH711	RH784	RH717	RH790	
24 x 48	RH706	RH779	RH712	RH785	RH718	RH791	

All shelving units include 4 posts (1 3/8" x 1 3/8" slotted angle), shelves, panels (for closed units), plastic feet and all necessary hardware.

Model	Dim	ens	ions	Angle	Steel			Wt.	
No.	W"	х	D"	Length'	Gauge	Colour	UDL*	lbs.	
SLOTTED ANGLE (14 GAUGE)									
RG979	1 3/8	Х	1 3/8	8	14	Grey	_	6	
RG980	1 3/8	Х	1 3/8	10	14	Grey	_	7	
RG981	1 3/8	Х	1 3/8	12	14	Grey	_	8.5	
RG982	2 1/2	Х	1 5/8	8	14	Grey	_	9	
RG983	2 1/2	Х	1 5/8	10	14	Grey	_	11	
RG984	2 1/2	Х	1 5/8	12	14	Grey	_	13	
RG320	3	Х	1 1/2	10	12	Galvanized	_	14	
RG321	3	Х	1 1/2	12	12	Galvanized	_	17	
SHELV	/ES (2	0	GAU	GE)					
RG985	12	Х	36	_	20	Galvanized	450	7	
RG986	15	Х	36	_	20	Galvanized	450	8.3	
RG987	18	Х	36	_	20	Galvanized	450	9.6	
RG988	24	Х	36	_	20	Galvanized	450	12.2	
RG989	32	Х	42	_	18	Galvanized	300	23.7	
RG990	12	Х	48	_	20	Galvanized	350	9.2	
RG991	15	Х	48	_	20	Galvanized	350	10.9	
RG992	18	Х	48	_	20	Galvanized	350	12.6	
RG993	24	Х	48	_	19	Galvanized	400	18.5	

*UDL: Maximum uniformly distributed load allowance where maximum shelf deflection is fully recovered when load is removed.

SIDE PANELS

		_			
Model	Dime	ens	ions	Steel	Wt.
No.	W"	х	Н"	Gauge	lbs.
RH759	12	Х	72	24	7
RH760	18	Х	72	24	11
RH761	24	Х	72	24	15
RH762	12	Х	84	24	8
RH763	18	Х	84	24	13
RH764	24	Х	84	24	17
RH765	12	Х	96	24	10
RH766	18	Х	96	24	14
RH767	24	v	96	24	19

BACK PANELS

Model	Dime	ens	ions	Steel	Wt.
No.	W"	X	Н"	Gauge	lbs.
RH768	36	Х	72	24	22
RH769	48	х	72	24	29
RH770	36	Х	84	24	25
RH771	48	х	84	24	34
RH772	36	Х	96	24	29
RH773	48	Х	96	24	38
KICK	PAN	ΙE	LS		
RH792	36	Х	3	20	1.3
RH793	48	х	3	20	1.7

STEEL SLOTTED ANGLE ALLOWS YOU TO DESIGN AND BUILD ANYTHING TO YOUR OWN SPECIFICATIONS:













Metal Decking

Tubing Storage

Overhead Storage

Overhead Storage

Wide Storage

Special Work Benches

SLOTTED ANGLE ACCESSORIES

CORNER GUSSET PLATE

- Add strength and rigidity to your slotted angle assembly
- 3" W x 3" L

Model No. RG994

PLASTIC FEET


Accomodate single or double 1 3/8" x 1 3/8" angle posts

Model No. RG237 single post Model No. RG238 double "T" post











ACCESSORIES

Model No.	Description	Wt. Ibs.
RG994	Corner gusset plate 3"	0.70
RG995	Nut and bolt	0.05
RG996	Boltless shelf clip	0.60
RG237	Plastic foot (simple post)	0.02
RG238	Plastic foot (double post)	0.03

WIRE SHELVING & CARTS

WIRE **SHELVING**

- Easy and quick shelf assembly
- Numbered posts for easy adjustment
- Easily converts into a mobile unit with the addition of casters
- Accessories such as baskets, dividers and matting allow for complete customization of unit
- Capacity: 800 lbs./shelf
- Chrome finish

Build your own shelving system in minutes!



Height'

54

63

74

86

SHELVES

Model	Dimensions						
No.	D"	х	W"	Wt. lbs.			
RK085	18	Х	36	8.5			
RK086	18	Х	48	11.8			
RK087	18	Х	60	15.5			
RK088	18	Х	72	18.0			
RK089	24	Х	36	11.5			
RK090	24	Х	48	15.0			
RK091	24	Х	60	19.5			
RK092	24	Х	72	24.5			

ACCESSORIES

WIRE BASKETS

- Generous sized baskets, ideal for storage of small items
- Chrome finish

SHELF DIVIDERS

Clip into place easily and can be repositioned to suit changing storage needs

Model No.

RK093

RKN94

RK095

RK096

Model

RK097

RK098

RK099

No.

CASTERS

Description

Set of four 5" casters,

5" Caster, no brake

5" Caster, with brake

2 with brake/2 without

Chrome finish

SOLID MATTING

- Cover standard shelves to create solid shelves
- PVC, clear, 1.7mm thick

Model No.	D"	х	W"	х	Н"	Wt.lbs.
WIRE BASKETS						
RK100	18	Х	8	Х	5	2.0
RK101	24	Х	8	Х	5	2.3
SHELF DIVIDERS						
RK102	18		Х		9	1.2
RK103	24		Х		9	1.5
SOLID MATTING						
RK104	18	Х	36			1.4
RK105	18	Х	48			1.8
RK106	18	Х	60			2.3
RK107	18	Х	72			2.7
RK108	24	Х	36			1.8
RK109	24	Х	48			2.4
RK110	24	Х	60			3.0
RK111	24	Y	72			3.6

MISCELLANEOUS

Model No.	Description	Qty/bag
RK112	Adjustable Feet	4
RK113	Plastic Split Sleeves	4
RK114	Add-on Shelf Connectors	4
RK115	S-Hook, for hanging items off of shelf	1

UTILITY CART

- Easy to manoeuvre around the office and commercial areas
- Comes with three 18" x 30" shelves, four 3" casters (2 with brake) and push handle
- Capacity: 300 lbs. Weight: 28.5 lbs.
- Chrome finish

Model No. RK116





WIRE BASKET UTILITY CART

- Designed for durability and manoeuvrability, ideal for office mail distribution
- Includes two 18" x 30" shelves, 2 convenient slide-out wire baskets, and four 3" casters
- Capacity: 400 lbs.
- Weight: 31.5 lbs.
- Chrome finish

Wt. Ibs.

6.3

7.0

8.0

8.8

Wt.

lbs

7.6

1.8

Cap.

225

225

Model No. RK117





UTILITY CARTS

- Strong, economical and versatile Ideal for office or warehouse use
- Include donut bumpers, 4" poly swivel casters and push handle
- Overall height is 35"
- Chrome finish
- Shipped knocked down

Shelf Size	Model	Wt.
D" x W"	No.	lbs.
18 x 24	RF893	40
18 x 30	RD279	43
18 x 36	RD280	48
18 x 42	RD281	52
18 x 48	RD282	54
24 x 24	RF895	58
24 x 30	RD271	60
24 x 36	RD273	63
24 x 42	RD275	65
24 x 48	RD276	67



Note: Units with 3 shelves also available.

ENCLOSED STEM CASTER CARTS

- Side and back enclosures feature a 3"x3" chrome mesh screen
- Include 4 chrome shelves, four 60"H posts, four 5" poly swivel casters and donut bumpers
- Shipped knocked down



Model	Shelf Size	Wt.
No.	D" x W"	lbs.
RD151	21 x 60	146
RD152	21 x 72	166
RD170	24 x 60	162
RD177	24 x 72	184



WIRE SHELVING

ADAPTA-PLUS WIRE SHELVING UNITS

- Open wire construction maximizes light penetration for better visibility, air circulation, and water coverage from sprinkler system
- · Rugged square post construction
- Chrome finish posts are 16 gauge and stainless steel posts are 18 gauge
- All posts include plastic top caps and leveling feet
- Shelves feature a capacity, depending on the width, from 800 to 1000 lbs. (based on static loads that are evenly distributed)
- Standard shelves can be assembled on a 2" slope

CHROME FINISH:

- · Impervious to the accumulation of dust
- Used widely in assembly line areas, manufacturing, electronics industry, offices and storage rooms

TECH-SEAL™:

- A state-of-the-art process to prevent corrosion
- Assures resistance to water, humidity, salt and UV
- · Guaranteed for 10 years against rust formation

STAINLESS STEEL FINISH:

- Made from #304 stainless steel
- Fully corrosion resistant and used mainly in clean rooms or food processing applications, anywhere bacteria cannot accumulate

CHROME WIRE SHELVING

	(60" H/4 SHELVE	72" H/4 SHELVES			
Shelf		Ad	d-On		Add	-On
W" x L"	Starter	Straight	90°	Starter	Straight	90°
18 x 36	RD317	RD316	RH446	RD300	RD299	RH462
18 x 48	RD319	RD318	RH448	RD302	RD301	RH464
18 x 60	RD321	RD320	RH450	RD304	RD303	RH466
18 x 72	RD323	RD322	RH451	RD306	RD305	RH467
24 x 36	RD309	RD308	RH454	RD292	RD291	RH470
24 x 48	RD311	RD310	RH456	RD294	RD293	RH472
24 x 60	RD313	RD312	RH458	RD296	RD295	RH474
24 x 72	RD315	RD314	RH459	RD298	RD297	RH475

STAINLESS STEEL WIRE SHELVING

	6	0" H/4 SHELV	ES	72" H/4	SHELVES	
Shelf	Add-On				Ado	l-On
W" x L"	Starter	Straight	90°	Starter	Straight	90°
18 x 48	RD466	RD465	RH576	RD456	RD455	RH592
18 x 60	RD468	RD467	RH578	RD458	RD457	RH594
24 x 48	RD462	RD461	RH584	RD452	RD451	RH600
24 x 60	RD464	RD463	RH586	RD454	RD453	RH602

Cariale 1

TECH-SEAL™ WIRE SHELVING


	60" H/4 S	HELVES		72" H/4 S	HELVES	
Shelf		Ado	l-On		Ado	I-On
W" x L"	Starter	Starter Straight 90°			Straight	90°
18 x 48	RD393	RD392	RH512	RD385	RD384	RH528
18 x 60	RD395	RD394	RH514	RD387	RD386	RH530
24 x 48	RD389	RD388	RH520	RD381	RD380	RH536
24 x 60	RD391	RD390	RH522	RD383	RD382	RH538

COMPONENTS

The Unique $CARI-ALL^{\tau_M}$ system uses a series of components... this versatility allows the option to choose the type of shelving that is best suited for a custom application.

WIRE SHELVES

Shelf	Wt.	Chrome	Tech-Seal™	Stainless Steel
W" x L"	lbs.	Finish	Finish	Finish
12 x 24	6	RD251	RD356	RD427
12 x 36	9	RD252	RD357	RD428
12 x 48	10	RD253	RD358	RD429
12 x 60	12	RD254	RD359	RD430
12 x 72	15	RD255	RD360	RD431
15 x 24	7	RD256	RD361	RD432
15 x 36	8	RD257	RD362	RD433
15 x 48	12	RD258	RD363	RD434
15 x 60	14	RD259	RD364	RD435
15 x 72	17	RD260	RD365	RD436
18 x 24	8	RD261	RD366	RD437
18 x 36	10	RD262	RD367	RD438
18 x 48	13	RD263	RD368	RD439
18 x 60	16	RD264	RD369	RD440
18 x 72	19	RD265	RD370	RD441
21 x 36	11	RD266	RD371	RD442
21 x 48	15	RD267	RD372	RD443
21 x 60	18	RD268	RD373	RD444
21 x 72	22	RD269	RD374	RD445
24 x 24	10	RD270	RD375	RD446
24 x 36	12	RD272	RD376	RD447
24 x 48	16	RD274	RD377	RD448
24 x 60	20	RD277	RD378	RD449
24 x 72	24	RD278	RD379	RD450



POSTS

Height"	Wt. Ibs.	Chrome	Tech-Seal™	Stainless Steel
36	2.5	RD346	RD409	RD494
43	3	RD347	RD410	RD495
54	3.7	RD348	RD411	RD496
60	4.2	RD349	RD412	RD497
72	5	RD350	RD413	RD498
84	6	RD351	RD414	RD499
96	7	RD352	RD415	RD500


B38


RACKING & SHELVING UNITS

PRONTO BULK STORAGE RACKS

- Up to 2000 lbs. capacity per shelf
- Starter unit includes two all-welded end frames, and three 5/8" presswood shelves flush-fitted into positive locking steel shelf beams (2 per shelf)
 Add-on units include only one end frame
- · Additional shelves may be added into any unit at 4" vertical centres
- · For extra stability and rigidity, all units feature three safety bars per shelf
- · Blue enamel finish
- · Rack only units (no wood shelves) are available upon inquiry

NOTE: Not recommended for powered lift truck applications.







		24" SHELF DEPTH		36" SHE	LF DEPTH	48" SHELF DEPTH		
Size		Cap.	Model	Wt.	Model	Wt.	Model	Wt.
W' x H'	Description	lbs.	No.	lbs.	No.	lbs.	No.	lbs.
7 x 8	Starter	1400	RA443	245	RA475	288	RA507	331
7 x 8	Add-on	1400	RA441	217	RA473	258	RA505	299
7 W	Add'l shelf	1400	RA470	63	RA502	76	RA534	89
8 x 10	Starter	2000	RA453	302	RA485	351	RA517	400
8 x 10	Add-on	2000	RA451	268	RA483	315	RA515	362
8 W	Add'l shelf	2000	RA471	78	RA503	93	RA535	108
8 x 12	Starter	2000	RA463	316	RA495	365	RA527	414
8 x 12	Add-on	2000	RA461	275	RA493	322	RA525	369
8 W	Add'l shelf	2000	RA471	78	RA503	93	RA535	108



DOUBLE RIVET BULKY STORAGE RACKS

An economical solution to any storage problem... from the supplies storage room, to the larger warehouse application.

Key features include:

- 7' H units have 4 shelves, 10' H units have 5 shelves
- Shelves adjustable on 1 1/2" centres
- Standard heights: 7' or 10'
 Standard depths: 30" or 48"
- Standard widths: 6' or 8'
- · Starter and add-on units available
- · Centre deck support for each shelf
- Each shelf includes 5/8" presswood deck · 6' W units have a capacity of 1000 lbs/shelf
- 8' W units have a capacity of 620 lbs/shelf
- · Baked enamel finish
- Colour: light putty

Components assemble easily without the need for special tools or fasteners. All you need is a rubber mallet.



30" SHELF DEPTH					48" SHELF DEPTH			
Size W' x H'	Starter Model No.	Wt. Ibs.	Add-on Model No.	Wt. Ibs.	Starter Model No.	Wt. Ibs.	Add-on Model No.	Wt. Ibs.
6 x 7	RK164	222	RK165	226	RK166	328	RK167	328
6 x 10	RK172	234	RK173	233	RK174	336	RK175	336
8 x 7	RK168	286	RK169	286	RK170	415	RK171	415
8 x 10	RK176	294	RK177	294	RK178	422	RK179	422

UPRIGHTS & STRINGERS

Make every inch of your storage space count by combining standard sized uprights and stringers (Box Type or Recessed Type) to create a racking system that is customized to your needs.

- Feature a 50 K.S.I. minimum yield to achieve higher load capacities
- Various racking accessories (below) may be added to store any specialty items that regular racking cannot handle All racking is FOB Concord, Ontario


Please contact our sales department for further technical assistance.

MEDIUM DUTY UPRIGHTS 20,000-LB CAPACITY

Depth						
Height	24"	30"	36"	42"	48"	60"
6′	RB798	RB800	RB802	RB803	RB804	RB805
7′	RB806	RB808	RB810	RB811	RB812	RB813
8′	RB814	RB816	RB818	RB819	RB820	RB821
9′	RB822	RB824	RB826	RB827	RB828	RB829
10'	RB742	RB744	RB746	RB747	RB748	RB749
11′	RB750	RB752	RB754	RB755	RB756	RB757
12'	RB758	RB760	RB762	RB763	RB764	RB765
13′	RB766	RB768	RB770	RB771	RB772	RB773
14'	RB774	RB776	RB778	RB779	RB780	RB781
15'	RB782	RB784	RB786	RB787	RB788	RB789
16′	RB790	RB792	RB794	RB795	RB796	RB797







TO HER TO BE DECE

HEAVY DUTY UPRIGHTS 27,000 LBS. CAPACITY

HEAVY DOTT OFRIGHTS 27,000 LBS. CAPACITY									
Depth									
Height	24"	30"	36"	42"	48"	60"			
6'	RB714	RB715	RB716	RB717	RB718	RB719			
7'	RB720	RB721	RB722	RB723	RB724	RB725			
8'	RB726	RB728	RB730	RB731	RB732	RB733			
9'	RB734	RB736	RB738	RB739	RB740	RB741			
10'	RB608	RB610	RB612	RB613	RB614	RB615			
11'	RB616	RB618	RB620	RB621	RB622	RB623			
12'	RB624	RB626	RB628	RB629	RB630	RB631			
13'	RB632	RB634	RB636	RB637	RB638	RB639			
14'	RB640	RB642	RB644	RB645	RB646	RB647			
15'	RB648	RB650	RB652	RB653	RB654	RB655			
16'	RB656	RB658	RB660	RB661	RB662	RB663			
18'	RB664	RB666	RB668	RB669	RB670	RB671			
20'	RB672	RB674	RB676	RB677	RB678	RB679			
22'	RB680	RB682	RB684	RB685	RB686	RB687			
24'	RB688	RB690	RB692	RB693	RB694	RB695			
26'	RB696	RB697	RB698	RB699	RB700	RB701			
28'	RB702	RB703	RB704	RB705	RB706	RB707			
30'	RB708	RB709	RB710	RB711	RB712	RB713			

BOX TYPE STRINGERS CAP. LBS. PER PAIR

Lgth	48	B"	54	1"	60	0"	66	6"	7	2"	78	"	8	4"	9	0"	96	5"	102	2"	10	18"	114	1"	12	:0"	126	6"	132	2"	13	8"	144	4"
	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Сар.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.
Hght	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs
2"	RB203	5340	RB204	4385	RB205	3551	RB206	2936	RB207	2466	RB208	2101	RB209	1578	RB210	1812	RB211	1388	RB195	1229	RB196	1096	RB197	984	RB198	888	RB199	805	RB200	733	RB201	671	RB202	616
2 1/2	RB220	7821	RB221	6952	RB222	6078	RB223	5024	RB224	4221	RB225	3596	RB226	3102	RB227	2702	RB228	2374	RB212	2103	RB213	1876	RB214	1684	RB215	1520	RB216	1378	RB217	1255	RB218	1149	RB219	1055
3"	RB237	9397	RB238	8350	RB239	7518	RB240	6839	RB241	6265	RB242	5630	RB243	4855	RB244	4229	RB245	3716	RB229	3293	RB230	2937	RB231	2636	RB232	2379	RB233	2158	RB234	1966	RB235	1799	RB236	1650
3 1/2	•		RB254	10032	RB255	9389	RB256	8536	RB257	7824	RB258	7222	RB259	6706	RB260	6187	RB261	5438	RB246	4817	RB247	4296	RB248	3856	RB249	3481	RB250	3157	RB251	2876	RB252	2632	RB253	2417
4"							RB270	10016	RB271	9181	RB272	8475	RB273	7870	RB274	7345	RB275	6886	RB262	6476	RB263	5775	RB264	5184	RB265	4670	RB266	4243	RB267	3866	RB268	3538	RB269	3249
4 1/2	t								RB284	10806	RB285	9975	RB286	9262	RB287	8645	RB288	8105	RB276	7628	RB277	7204	RB278	6825	RB279	6207	RB280	5630	RB281	5130	RB282	4694	RB283	4310
5"													RB297	10727	RB298	10012	RB299	9386	RB289	8834	RB290	8344	RB291	7904	RB292	7509	RB293	7152	RB294	6312	RB295	6050	RB296	5557
5 1/2	t																		RB300	10100	RB301	9540	RB302	9037	RB303	8585	RB304	8176	RB305	7805	RB306	7466	RB307	6998
6"																			RB308	10400	RB309	10338	RB310	9794	RB311	9304	RB312	8861	RB313	8458	RB314	8091	RB315	7754
6 1/2	ł																								RB316	10200	RB317	10372	RB318	9901	RB319	9470	RB320	9076


RECESSED TYPE STRINGERS 7/8" CAP. LBS. PER PAIR

Lgth	48	3"	54	1"	60)"	66	;"	72	2"	78	3"	84	4"	90	"	9	6"	10:	2"	10	8"	11	4"	12	0"	120	6"	13	32"	138	3"	14	44"
	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Сар.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.
Hght	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs
2 1/2	RB379	7143	RB381	6349	RB383	5714	RB385	4800	RB387	4041	RB389	3443	RB391	2970	RB393	2586	RB395	2273	RB363	2014	RB365	1796	RB367	1612	RB369	1455	RB371	1320	RB373	1206	RB375	1100	RB377	1010
3"	RB413	9115	RB415	8102	RB417	7292	RB419	6629	RB421	6077	RB423	5364	RB425	4625	RB427	4030	RB429	3540	RB397	3137	RB399	2798	RB401	2511	RB403	2266	RB405	2055	RB407	1873	RB409	1719	RB411	1574
3 1/2			RB447	10334	RB449	9310	RB451	8463	RB453	7758	RB455	7161	RB457	6650	RB459	6068	RB461	5333	RB431	4725	RB433	4214	RB435	3782	RB437	3414	RB439	3096	RB441	2821	RB443	2582	RB445	2371
4"					RB479	10886	RB481	9897	RB483	9272	RB485	8374	RB487	7776	RB489	7258	RB491	6804	RB463	6337	RB465	5652	RB467	5072	RB469	4578	RB471	4153	RB473	3783	RB475	3462	RB477	3179
4 1/2									RB509	10718	RB511	9894	RB513	9187	RB515	8575	RB517	8039	RB493	7565	RB495	7106	RB497	6769	RB499	6140	RB501	5569	RB503	5074	RB505	4642	RB507	4264
5"													RB535	10325	RB537	9637	RB539	9035	RB519	8503	RB521	8030	RB523	7608	RB525	7277	RB527	6884	RB529	6355	RB531	5819	RB533	5343
5 1/2																	RB557	10382	RB541	9772	RB543	9229	RB545	8743	RB547	8306	RB549	7910	RB551	7500	RB553	7222	RB555	6786
6"																			RB559	10416	RB561	9838	RB563	9320	RB565	8853	RB567	8432	RB569	8049	RB571	7699	RB573	7378
6 1/2"																									RB575	10593	RB577	10088	RB579	9630	RB581	9210	RB583	8827

RECESSED TYPE STRINGERS 1 5/8" CAP. LBS. PER PAIR

Lgth	4	8"	5	4"	60	"	6	6"	7	2"	78	3"	84		90		9	6"	102	2"	10	8"	114		12	0"	12	6"	132	2"	13	8"	14	4"
	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.	Model	Cap.
Hght	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs	No.	lbs
2 1/2	RB380	7143	RB382	6349	RB384	5714	RB386	4800	RB388	4041	RB390	3443	RB392	2970	RB394	2586	RB396	2273	RB364	2014	RB366	1796	RB368	1612	RB370	1455	RB372	1320	RB374	1206	RB376	1100	RB378	1010
3"	RB414	9115	RB416	8102	RB418	7292	RB420	6629	RB422	6077	RB424	5364	RB426	4625	RB428	4030	RB430	3540	RB398	3137	RB400	2798	RB402	2511	RB404	2266	RB406	2055	RB408	1873	RB410	1719	RB412	1574
3 1/2			RB448	10334	RB450	9310	RB452	8463	RB454	7758	RB456	7161	RB458	6650	RB460	6068	RB462	5333	RB432	4725	RB434	4214	RB436	3782	RB438	3414	RB440	3096	RB442	2821	RB444	2582	RB446	2371
4"					RB480	10886	RB482	9897	RB484	9272	RB486	8374	RB488	7776	RB490	7258	RB492	6804	RB464	6337	RB466	5652	RB468	5072	RB470	4578	RB472	4153	RB474	3783	RB476	3462	RB478	3179
4 1/2									RB510	10718	RB512	9894	RB514	9187	RB516	8575	RB518	8039	RB494	7565	RB496	7106	RB498	6769	RB500	6140	RB502	5569	RB504	5074	RB506	4642	RB508	4264
5"													RB536	10325	RB538	9637	RB540	9035	RB520	8503	RB522	8030	RB524	7608	RB526	7277	RB528	6884	RB530	6355	RB532	5819	RB534	5343
5 1/2"																	RB558	10382	RB542	9772	RB544	9229	RB546	8743	RB548	8306	RB550	7910	RB552	7500	RB554	7222	RB556	6786
6"																			RB560	10416	RB562	9838	RB564	9320	RB566	8853	RB568	8432	RB570	8049	RB572	7699	RB574	7378
6 1/2							1										I								RB576	10593	RB578	10088	RB580	9630	RB582	9210	RB584	8827

ACCESSORIES FOR PALLET RACKING



UPRIGHT PROTECTOR

- · Protects industrial racking from those damaging impacts that can cause unsafe conditions
- Made from 1/4" thick steel with a 90° bend
- 18 1/4" overall height; 4 3/4" inside depth; 7" overall depth and 5" sides
- Weight: 12 lbs.
- · Highly visible safety yellow
- 4 pre-drilled holes made for 1/2" anchors (not included)

Model No. RB925



STORAGE RACKS

BAR STORAGE RACKS

All steel vertical and horizontal racks are ideal for storing bars, tube, pipe and angle. Economical knocked-down design reduces storage and shipping costs.

COMBINATION VERTICAL RACK

- Stores bars up to 12' long and features 3 shelves for extra storage of small parts
- 8" deep arms divided into 3 sections
- Base size: 36" x 24"
- Height: 84"
- · Capacity: 3000 lbs.
- · Kleton blue finish
- · Wt.: 128 lbs.



Model No. RB959

HORIZONTAL BAR RACK

- Stores bars up to 10' long
- 9" deep arms with 9 storage levels at 6" intervals
- Capacity: 1800 lbs.Base: 30" sq.
- Height: 84"
- · Kleton Blue finish
- Wt.: 68 lbs.



Model No. RB958

MOBILE PIPE AND BAR RACK

- Safely stores up to 1000 lbs. of material
- Folds to compact size of 61" x 34" x 15 1/2"
- · Features 4 rack levels with curved edges to prevent pipe from rolling off
- · Constructed of structural square tubing
- · 2 swivel and 2 rigid, 6" hard rubber casters
- O.A. Dim.: 58 1/2" W x 34" D x 58" H
- · Kleton blue finish
- Wt.: 100 lbs.

Model No. RB951







MINITREE™ CANTILEVER RACK

- · Light-duty adjustable arm cantilever rack
- · Efficient storage of plastics, conduit, extrusions, hydraulic tubing, etc.
- Capacity/arm: 250 lbs.
- Overall dimensions: 36" W x 18 1/4" D x 76 1/4" H (single); 36" W x 30" D x 76 1/4" H (double)
- Shipped knocked down

Model No.	Description	Capacity lbs/Column	Wt.
RG621	Single-Sided, 14 Single Arms	1750	165
RG622	Double-Sided, 14 Double Arms	3500	215



QUIK-TREE® CANTILEVER RACK

- · Ideal for storage of steel, iron, aluminum, wood or plastic pipe
- Seven 14" arms per column side and adjustable on 1 1/2" centres
- Capacity/arm: 500 lbs.
- Overall dimensions: 36" W or 72" W x 21" D x 84" H (single); 36" W or 72" W x 34" D x 84" H (double)
- Shipped knocked down




	Brace Set	Cap. lbs/	Model No.	Wt.	Model No.	Wt.
Description	L'	Column	Starter	lbs.	Add-on	lbs.
Single-Sided, 14 Arms	3	3500	RG631	237	RG632	135
Double-Sided, 28 Arms	3	7000	RG633	345	RG634	189
Single-Sided, 14 Arms	6	3500	RB177	255	RB176	153
Double-Sided, 28 Arms	6	7000	RB173	363	RB172	207

AIRECTOR®

- · Constructed of a welded base unit that includes a steel reinforced wood deck and a set of 4 welded tubular steel posts
- Features a 4000-lb stacking capacity and can be stacked up to 4 units high
- · Includes 1" x 6" sturdy deckboards
- · Utilizes warehouse airspace and can be easily relocated
- Base frame has six centre supports for 4-way entry by lift trucks
- Posts and bases sold separately

Model		Dimensions	Wt.
No.	Description	W" x L"	lbs.
RB954	Wood Deck Base	42 x 48	96
RB955	Wood Deck Base	42 x 60	114
RB956	Wood Deck Base	48 x 48	111
RB957	Wood Deck Base	48 x 60	127
RB966	Posts (set of 4)	36" H	46
RB967	Posts (set of 4)	42" H	52
RB968	Posts (set of 4)	48" H	58

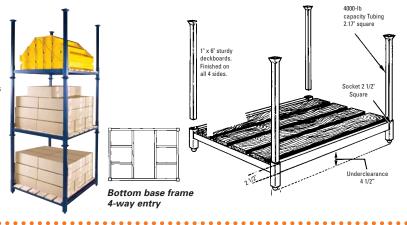

STACKING U-RACKS

- · Lightweight, inexpensive and easy to use
- · Stacks up to four units high
- · All welded construction
- · Inside dimensions:
- 16 1/2" W (bottom) x 25 1/4" W (top) x 15 3/4" H
- · Units are packaged and sold individually

Model	Capacity	Wt.
No.	lbs/pr.	lbs.
RB969	6000	25
RB970	10000	30



PORTABLE STACKING RACKS

- · A highly flexible storage system that is expandable in length, width and height
- · Sturdy, yet lightweight, easy for one person to assemble
- · All welded steel construction requires no tools or fittings

Model	0v	era	II Din	nens	sions	Cap	Wt.
No.	W"	х	L"	х	Н"	lbs.	lbs.
RB952	12	х	16	Х	13 1/2	2500	18
RB953	14	Х	19	Х	17	3700	25.5
RB964	15	Х	22	Х	20 1/2	5600	31
RB965	16	Х	26	Х	23 1/2	7500	44





PIPE FITTINGS



There are many variations of fittings to suit a wide range of applications, providing the versatility to achieve any structural configuration. *Kee Klamp** fittings are galvanized malleable iron castings designed to suit eight sizes of tube.

A standard hex key and tube cutters are the only tools required to create strong, rigid structures.

Recessed set screws, tightened by the hex key, firmly lock the tube into the fitting. The setscrew is manufactured in casehardened steel and is coated to protect against corrosion.








KEE KLAMP®


- Simple method of constructing tubular structures
- Cost effective alternative to welding
- Galvanized to resist corrosion

Pipe Sizes" 3/4 1 1 1/4 1 1/2 2	SHORT TEE RK597 RK598 RK599 RK600 RK601	LONG TEE RK602 RK603 RK604 RK605 RK606	SIDE OUTLET TEE RK607 RK608 RK609 RK610 RK611	TWO SOCKET CROSS RK612 RK613 RK614 RK615 RK616
3/4 1 1 1/4 1 1/2 2	90° ELBOW RK617 RK618 RK619 RK620 RK621	ANGLE CROSS N/A RK622 RK623 RK624 N/A	ANGLE TEE N/A RK625 RK626 RK627 N/A	3 WAY 90° ELBOW RK628 RK629 RK630 RK631 N/A
3/4 1 1 1/4 1 1/2 2	ADJUSTABLE SHORT TEE N/A RK632 RK633 RK634 N/A	TWO SOCKET CROSS N/A RK635 RK636 RK637 N/A	BASE FLANGE RK638 RK639 RK640 RK641 RK642	RAILING BASE FLANGE RK643 RK644 RK645 RK646 RK647
3/4 1 1 1/4 1 1/2 2	PLASTIC END PLUGS RA179 RA180 RA181 RA182 RA183	GROUND SOCKET N/A RK648 RK649 RK650 N/A	CLAMP ON TEE RK651 RK652 RK653 RK654 N/A	GATE EYE RK655 RK656 RK657 RK658 N/A
3/4 1 1 1/4 1 1/2 2	RK659 RK660 RK661 RK662 N/A	HANDRAIL BRACKET RK663 RK664 RK665 RK666 N/A	RAILING SUPPORT VERTICAL N/A RK667 RK668 RK669 N/A	RAILING SUPPORT HORIZONTAL N/A RK670 N/A N/A N/A
3/4 1 1 1/4 1 1/2 2	SIDE PALM FIXING N/A RK671 RK672 RK673 N/A	INTERNAL SWIVEL TEE N/A RK674 RK675 RK676 N/A	SHORT SWIVEL TEE RK677 RK678 RK679 RK680 N/A (sold in pairs only)	SLEEVE JOINT RK681 RK682 RK683 RK684 RK685

B42

PIPE FITTINGS & PIPE

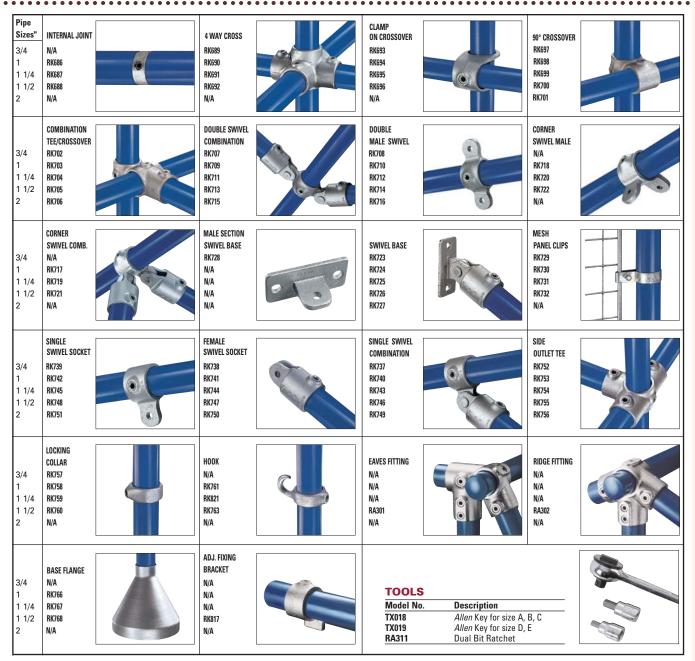



Note: Drawings not to scale.

PIP

Build an unlimited array of strong rigid structures combining standard black iron (unthreaded) pipe or galvanized (threaded - on one side) pipe (schedule 40), with any combination of corresponding sized *Kee Klamps*[®] fittings. Pipe sizes are available from 3/4" to 2" (inside diameter). Standard pipe length is 21', with cut lengths available upon request. A cutting charge will be added per cut length of piping.

Pipe Diameter"	Fitting Size	Pipe Length'	Black Iron Model No.	Galvanized Iron Model No.
3/4	Α	21	RA109	RA110
1	В	21	RA111	RA112
1 1/4	С	21	RA113	RA114
1 1/2	D	21	RA115	RA116
2	E	21	RA117	RA118


STORAGE CABINET

WELDED STORAGE CABINETS

- · Suitable for office, plant, school or institutional storage needs
- Fully adjustable shelves, recessed handle, cylinder lock, and coat rods (wardrobe and combination types)
- Choose from Hi-Boy, Lo-Boy, wardrobe, and combination cabinets
- Lo-Boy comes with 2 shelves
- Capacity: 150 lbs. evenly distributed



FB039 Hi-Boy Type







HEAVY-DUTY

RUBBERMAID® PLASTIC CABINETS

- Durable resin construction is easy to clean, will not rust or crack
- Functional and modular organization Doors are lockable (locks not included)
- Quick assembly without tools
- Ventilated shelves hold 180 lbs. each



Home Products

MH725



Note: 2 units shown

B44

Model		Din	nens	ion	s	No. of	Wt.
No.	W"	х	D"	х	Н"	Shelves	lbs.
MH722	36	х	18	х	72.3	3	55
MH724	36	Х	18	Х	37.3	1	28
MH725	36	Х	18	Х	72	3	40

MH724



MH722



STORAGE CABINETS

COMPACT CABINETS

COUNTER HIGH CABINETS

- · Serves as counter and cabinet combo
- Double doors w/three-point door locking device swing to full 180°
- Quiet operating cabinet
- Two shelves, adjustable every 2"
- · Cabinet dimensions:
- 36" W x 42" H with 18" or 21" D
- Capacity: 180 lbs. per shelf
- Shipped knocked down



Model			Wt.
No.	Description	Depth"	lbs.
FF985	High cabinet	18	88
FF986	High cabinet	21	96
FF987	Extra shelf (For FF985)	18	9
FF988	Extra shelf (For FF986)	21	7



ECONOMICAL COMPACT CABINETS

- Ideal anywhere a full-sized cabinet is too large
- Includes adjustable shelves
- Locking door

Model			Size			No.	Wt.	
No.	W"	х	D"	х	Н"	Shelves	lbs.	
FH482	21	Х	15	Х	35	2	33	
FH483	30	Х	15	Х	66	4	50	



VISUAL CABINETS

- · Keep a close eye on valuable inventory
- · Plexiglass door panels resist breakage and will not shatter
- 22-gauge shelves, adjustable on 2" centres
- 20-gauge steel doors
- 3-point locking mechanism with die-cast locking handle (includes 2 keys)
- 150-lb capacity per shelf
- · Shipped knocked down



Model				No.		
No.	W"	Х	D"	X	H"	Shelves
MI629	30	Х	12	Х	26	2
MI630	36	Х	18	Х	42	2
MI631	36	Х	24	Х	78	4

FULL-SIZED CABINETS



JUMBO STORAGE CABINET

- · High capacity cabinet securely stores large, bulky items
- · Four adjustable shelves, lock and handle are included
- · Grey or tan enamel finish
- · Capacity per shelf: 150 lbs.
- Shipped knocked down

Mode	l No.		Dimensions					
Grey	Tan	Description	W"x D" x H"	lbs.				
FB051	FB049	Cabinet	48 x 24 x 78	250				
FB054	FB050	Add'l shelf	48 x 24	20				





DEEP DOOR STORAGE CABINET

- · Padlock hasp (cannot be accessed by bolt cutters) helps secure the contents of this deep door high-density storage cabinet
- 4 reinforced adjustable main shelves are complemented by 6 adjustable mini shelves in each 4" deep hinged door for a capacity unmatched by any other cabinet
- Padlock sold separately
- Capacity per shelf: 175 lbs.

Model		Dimensions Wi	t.
No.	Description	W" x D" x H" lbs	s.
FB024	Cabinet	38 x 24 x 72 31	5
FB025	Extra shelf for cabinet	38 x 21 1/4 18	3
FB026	Extra shelf for door	18 x 6 2	



HEAVY-DUTY WELDED STORAGE CABINET

- All-welded 20-gauge steel cabinet features four adjustable 18-gauge shelves, locking handle
- Shelves adjust on 2" centers
- Capacity per shelf: 300 lbs. evenly distributed

Model		Di	3	Wt.			
No.	Description	W"	х	D"	Х	Н"	lbs.
FB021	Cabinet	36	Х	18	Х	72	185
FB022	Add'l shelf	36	Х	18	Х	1	8

HEAVY-DUTY CABINET DOLLIES

- · Makes cabinets fully mobile
- · Allows for easy access during cleaning
- Two rigid and two swivel with brake, 5" poly casters
- · Capacity: 800 lbs. evenly distributed



Model	Dimensions								
No.	W" >	D"							
MI632	36 x	18							
MI633	36 x	24							
MI634	48 x	18							
MI635	48 x	24							

HEAVY-DUTY STORAGE PRODUCTS

EXTRA HEAVY-DUTY SHELVING

- · Excellent for storage of dies, fixtures, jigs, or any heavy material
- Uprights are 13-gauge formed angle 2" x 2", punched on 1" centres for quick and easy shelf adjustment
- Shelf capacities based on loads that are evenly distributed
- Extra shelves and 96" high units are available
- · Each unit includes 5 shelves
- Shelves are 14-gauge with 2" deep channels on all four sides
- Extra channel welded to the bottom of shelf to prevent flexing under heavy loads
- · Grey baked enamel finish

Model	D	im	ensi	ion	IS	Capacity per	Wt.	
No.	W"	х	D"	х	Н"	Shelf lbs.	lbs.	
RC524	36	х	18	х	72	1570	167	
RC525	48	Х	18	Х	72	1600	212	
RC526	60	Х	18	Х	72	1500	252	
RC527	36	Х	24	Х	72	1625	197	
RC528	48	Х	24	Х	72	1650	242	
RC529	60	Х	24	Х	72	1500	292	



CLEARVIEW CABINETS

- · Clear polycarbonate windows so all your tools and supplies are visible at a glance
- 12-gauge one-piece body design
- 6" sweep space
- · Adjustable 14-gauge shelves
- Three-point locking device
- · Hinges are 10-gauge



Model	Model Dimensions		ns	0. A.	No. of	Shelf	Wt.		
No.	W"	х	D"	х	Н"	Ht"	Shelves	Cap. lbs.	lbs.
FG851	48	Х	24	Х	60	66	3	1200	446
FG852	48	Х	24	Х	72	78	4	1200	536

VISIBLE STORAGE WIRE MESH CABINET

- · All-welded mesh storage cabinet provides a secure yet visible area to place your tools and equipment
- · Reinforced K-brace welded to the door frame delivers additional strength
 Diamond shaped 13-gauge steel mesh
 Adjustable shelves bolt into holes

- Door has three-point latching system with cam-lock and chrome plated handle
- Dimensions: 24" W x 21" D x 72" H
- · Weight: 146 lbs.

Model No. FB015



HEAVY-GAUGE STORAGE CABINETS

- · All-welded 14-gauge cabinets and shelves which can be adjusted every 3"
- Doors feature secure 3-point locking system
- Optional 7-gauge bolt-on-legs are available adding 4" to overall height of cabinet and provide fork lift access to move cabinet
- · Capacity: 1450 lbs/shelf



Model	No. of	Dimensions	Wt.
No.	Shelves	W" x D" x H"	lbs.
FB013	4	36 x 21 x 78	370
FB012	3	36 x 21 x 60	300
FB011	2	36 x 21 x 42	230
FB014	-	Bolt-on-legs, set of 4" high	24

GUARDMASTER™ HEAVY-DUTY STORAGE CABINETS

THESE CABINETS ARE SO TOUGH, THEY'RE LIKE HAVING SAFES ON YOUR SHOP FLOOR FOR STORAGE

- · Fully-welded construction offers exceptional strength and durability
- 16-gauge steel with 18-gauge double walled doors and heavy 14-gauge floor
- Flush mounted handle
- Shelves are adjustable on 2" centers
- Premium paint is textured to hide smudges
- Galvanized steel shelves carry an allowable uniform load of 1000 lbs.





Model	[Dim	ensi	ons		No. of	Wt	
No.	W" x D" x I		Н"	Shelves	lbs.			
FH434	36	Х	21	Х	42	2	185	
FH435	36	Х	21	Х	60	3	240	
FH436	48	Х	24	Х	66	3	380	
FH437	36	Х	21	Х	72	4	300	
FH438	48	Х	24	Х	78	4	350	
FH439	36	Х	21	Х	78	4	485	

B46

SHOP DESKS & CABINETS

WALL-MOUNTED SHOP DESK



A SPACE SAVER

The large 34 1/2" W x 30" D x 19" H desktop provides a convenient writing area without utilizing valuable floor space.

24" W x 28" D x 3 1/2" H locking drawer on quiet nylon rollers. Wall mounting brackets included. Grey enamel finish.

Model No. FH486 85 lbs.

FLOOR MODEL FOREMAN'S DESK



Ideal for shipping and receiving clerks, watchmen and shop foremen.

24" W x 28" D x 3 1/2" H locking drawer that glides quietly on nylon rollers. Overall dimensions: 34 1/2" W x 30" D x 53" H. Heavy gauge steel in grey enamel finish. Some assembly required.

Model No. FH487 105 lbs.

CABINET STYLE SHOP DESK



This solid unit offers the convenience of the floor model foreman's desk, with a locking cabinet for added storage space.

Sloping top is a comfortable 43" high at front. Large locking drawer and double door cabinet. Overall dimensions: 34 1/2" W x 30" D x 53" H. Some assembly required. Grey enamel finish.

Model No. FH488 150 lbs.

DELUXE SHOP DESK



4 drawers of filing/storage space and an 8-compartment sorter makes this an all-purpose desk for warehouses, shops and shipping and receiving departments. Comes with one tray drawer with cylinder lock, two double-deep file drawers with recessed handles, and one all purpose drawer. Desk top sorter keeps papers handy and organized. Use lower shelf for extra storage space or as a footrest. Overall dimensions: 39" W x 28 3/4" D x 55 1/2" H. Grey baked enamel finish.

Shipped knocked down.

Model No. FH459 179 lbs.

OPEN STYLE SERVICE WRITER



This unit provides a locking upper door cabinet with one shelf for added storage space. Comes with sloping writing top and large 25 3/8" W x 16 1/2" D x 3 3/4" H locking drawer with recessed pull that opens fully on smooth slides. Use lower shelf for extra storage or as a convenient footrest. Overall dimensions: 31 1/2" W x 21" D x 72 1/2" H. Tan baked enamel finish.

Shipped knocked down.

Model No. FH386 127 lbs.

CLOSED STYLE SERVICE WRITER



Same features as Model FH386 plus a locking lower door compartment with one shelf for storage of large/bulky items. Overall dimensions: 31 1/2" W x 21" D x 72 1/2" H. Shipped knocked down.

Model No. FH385 171 lbs.

- Rugged, all-welded steel lockers will provide years of maintenance free service
- · Designed for industrial, commercial, mining,
- institutional, sports, educational and government facilities
- Locker components are welded together, eliminating nuts, bolts and rivets
- Dimensions: 12" W x 18" D x 72" H
- Scratch-proof recessed plastic pocket, 10-gauge padlock hasp
- Doors are completely flush to locker frame
- · Ventilation holes on frame cross piece

- · Single tier lockers include hat shelf and three hooks
- · Double and triple tier lockers have two hooks per opening
- Frame is 16-gauge steel
- Door frames are 20-gauge with full length 24-gauge double panel
- Baked enamel grey paint finish (beige also available)
- · Recessed base colour: black
- Custom colours available (subject to min.quantities)
- · Mesh door lockers available with slope tops and recessed base



- Select single, double, triple or six-tier locker.
- 2. Select a basic locker with sloping top, recessed base or both.
- 3.Determine the quantity of each bank (banks of 1, 2, 3 or 4).

Note: 6-tier lockerette available in bank of 1 only.









SINGLE TIER LOCKERS

	Bank of 1	Wt.	Bank of 2	Wt.	Bank of 3	Wt.	Bank of 4	Wt.
Туре	Model No.	lbs.						
Basic style	FC116	52	FC152	96	FC186	139	FC222	183
w/Slope top	FC125	56	FC161	104	FC195	151	FC231	199
w/Recessed base	FC119	56	FC155	104	FC189	151	FC225	199
w/Recessed base & slope top	FC122	60	FC158	112	FC192	163	FC228	215
w/Mesh door basic style	FC723	52	FC725	96	FC727	139	FC729	183

OPTIONAL FEATURES:

Also available for all lockers

- Cylinder Locks
- Number Plates
- Coat Rods
- Chrome Pocket









DOUBLE TIER LOCKERS

	Bank of 1	Wt.	Bank of 2	Wt.	Bank of 3	Wt.	Bank of 4	Wt.
Туре	Model No.	lbs.						
Basic style	FC246	53	FC270	98	FC294	141	FC318	187
w/Slope tops	FC255	57	FC279	106	FC303	153	FC327	203
w/Recessed base	FC249	57	FC273	106	FC297	153	FC321	203
w/Recessed base & slope top	FC252	61	FC276	114	FC300	165	FC324	219
w/mesh door basic style	FC716	53	FC718	98	FC720	141	FC721	187









TRIPLE TIER LOCKERS

	Bank of 1	Wt.	Bank of 2	Wt.	Bank of 3	Wt.	Bank of 4	Wt.
Туре	Model No.	lbs.						
Basic style	MH710	55	MH711	100	MH712	142	MH713	189
w/Recessed base & slope top	MH714	63	MH715	116	MH716	167	MH717	222
w/mesh door basic style	MH718	54	MH719	99	MH720	140	MH721	186

6-TIER LOCKERETTE

- · Ideal locker for storage of personal effects where space is at a premium
- 6 vertical compartments measuring 12" W x 18" D x 12" H each

Description	Model No.	Wt. lbs.
Basic style	FC330	56
w/Slope top	FC339	60
w/Recessed base	FC333	60
w/Recessed base	FC336	64
& slope top		
w/Mesh door	FD196	50
basic style		



- Sloping top prevents the collection of debris and is easier to maintain against the accumulation of dust
- · Recessed base raises locker 4" off the floor
- Scratch resistant plastic pocket





OPTIONAL FEATURES AVAILABLE:

Cylinder lock FC100

Number plates Installed - FC101 Uninstalled - FC102

Coat rod FC103

Chrome pocket FC598

Available in bank of one only.



LOCKERS & BENCH

PLASTIC LOCKERS

TRY A NEW GENERATION OF LOCKERS!

- · Lockers are maintenance free
- · Standard drain holes make them easy to clean: just hose them down with soap and water
- · Tough plastic construction makes them perfectly suited for use in food processing plants, athletic facilities or any other wet environment

SPECIFICATIONS:

- · Rust-proof
- Non-corrosive
- · No need for painting
- · Maintenance-free
- · Easy installation
- · Space saver
- · Easy washing
- · Tough polyethylene construction
- · Each unit fully assembled







Built-in sloped

top for extra

. storage

1 unit of FC695



3 units of FC689 1 units of FC691

16-DOOR ARCHETTE



- · Ideal for confined spaces
- 16 lockable compartments
- Bar for hanging garments
- Compartments are 12" W x 18" D x 12" H
- Overall dimensions: 72" W x 18" D x 72" H
- Colour: Light grey
- · Assembly required

Model No.	Туре	Wt. lbs.
FC347	w/Padlock Hasp	123
FC348	w/Cylinder Lock	131

Model Dimensions Wt. Shelf No. Description W" x D' lbs. Hook FC687* 12" H Locker (usually stacked 6 units high) 12 x 15 6 No No 18" H Locker (usually stacked 4 units high) FC689 15 x 15 10 No No FC691 18" H Locker w/slope top 15 x 15 12 No No FC693* 36" H Locker (usually stacked 2 units high) 12 x 15 16 Yes No Full Size 60" H Locker w/Slope Top 15 Yes

All dimensions and weights are nominal and may vary due to moulding tolerances Mounting hardware not included

PERSONAL EFFECTS LOCKERS







FC064



WOOD LOCKER ROOM BENCHES



- · Necessary for any locker room
- · Features chrome steel legs that can be used free-standing or bolted to the floor

Model		D	imen	sio	ns		Wt.
No.	L"	х	W"	х	H"	Туре	lbs.
FB002	72	Х	12	Х	17	Steel	35
FB003	48	Х	10	Х	16 1/2	Wood	23
FB004	72	Х	10	Х	16 1/2	Wood	31
FB005	96	Х	10	Х	16 1/2	Wood	39



- · Effective security system for storage of uniforms, linens, protective clothing, personal items, etc.
- Up to 16 people can have security of their own individual compartment
- · Authorized personnel can open large master door with one key, for uniform replacement/security problems
- Compact design saves space
- All models finished in durable dove grey enamel
- · Shipped assembled

Model	No. of	Overall Dimensions	Wt.
No.	Compartments	W" x D" x H"	lbs.
FC063	9	24 x 15 x 84	122
FC064	10	18 x 15 x 78	91
FC066	16	18 x 15 x 78	106

^{*12&}quot; and 36" lockers are flat tops only.

SECURITY GATES


STEEL FOLDING SECURITY GATES

SINGLE AND DOUBLE, BI-PARTING GATES


(Single gates are all left mounted, from outside facing in, with right side lock bar) Control access without losing visibility or air circulation.

- Doors
- Corridors
- · Lift up doors Garage doors
- · Receiving and expediting doors Docks

Double



Single



•	Entranceways
Ν	OUNTINGS:

- Surface mount, wall surface or outside of door frame
- Recess mount, between two walls or within a door frame

Max. Width'	Width Retracted Left Side"	Width Right Side"	6 1/2' Retracted Height Model No.	Wt. Ibs.	7 1/2' Retracted Height Model No.	Wt. Ibs.	8 1/2' Retracted Height Model No.	Wt. Ibs.
DOUBLE, BI-	PARTING GATES							
8	9	12	KA026	100	KA028	108	KA030	116
10	10	13	KA001	120	KA003	128	KA005	136
12	11	13	KA006	140	KA008	148	KA010	158
14	12	15	KA011	150	KA013	158	KA015	166
16	13	15	KA016	160	KA018	166	KA020	172
18	14	17	N/A	N/A	KA022	174	N/A	N/A
SINGLE GAT	ES							
4	-	10	KA036	58	KA040	64	KA044	70
5	-	11	KA046	61	KA050	65	KA054	69
6	-	12	KA056	64	KA060	68	KA064	72
7	-	13	KA066	69	KA070	73	KA074	77
8	-	13	KA076	74	KA080	80	KA084	87
9	-	14	N/A	N/A	KA088	87	N/A	N/A

PORTABLE FOLDING GATES

The easy, portable answer to controlled access. When you need it, roll it to the location needed and extend it.

IDEAL FOR:

- Pedestrian traffic flow control
- Temporarily closed hallways, corridors and passageways

FEATURES:

- Galvanized finish
- 3" rubber wheels on 30" axles
- Fits openings up to 12' wide
- 78" height when retracted and
- 72" when fully extended
- Retracted width is 32"
- Add-on unit bolts on to the end of the gate
- Adds another 6' of width and includes all necessary hardware

Model No.	Description	Wt. Ibs.
KA091	Portable Gate	129
KA126	Add-On Unit	60



DOOR & WINDOW FOLDING GATES

ENHANCE YOUR DOOR AND WINDOW SECURITY

- · Mount on right or left side, inside the door/window frame, or on the wall surface
- Standard available heights start at 31" and go through 71"
- Retracted width is 8" on all models listed in table below
 - Maximum width is 42"
- · 15-gauge steel U channels riveted back to back using aircraft quality rivets
- Posts are 1" round, 14-gauge steel
- · Padlock hasp, with galvanized finish, included that accepts 3/8" shackle (Padlock not included)
- · Gate height drops 1" per extended lineal foot

Model No.	Retracted Height"	Wt. Ibs.
KA128	68	45
KA129	73	47
KA130	79	50

COLUMN PROTECTORS

Protect your building's columns from damaging bumps by moving vehicles.

STRUCTURAL COLUMN PROTECTORS

- Octagon configuration for more rebounding ability
- 100% rust proof
- Flexible deflection design capable of handling a hit from a 7000-lb forklift at 6 mph
- Easy to assemble
- Nylon fasteners (included) for breakaway ability

EXTREMELY VERSATILE

- Fits over 80% of standard columns
- Protect columns under virtually any condition and temperature down to 0°F

Model No.	Size"	Fits Square Column"	Fits H Column"	Fits Round Column"	Dia."	Overall Height"	Wt. lbs.
KH779	6 Sq.	Up to 6	Up to 6 x 6	Up to 6 Dia.	26	42	46
KH780	8 Sq.	6 to 8	6+ to 8 x 8	6 to 8 Dia.	26	42	46
KH781	10 Sq.	8 to 10	8+ to 10 x 10	8 to 10 Dia.	26	42	46
KH782	12 Sq.	10 to 12	10+ to 12 x 12	10 to 12 Dia.	26	42	46
KH783	9 Round	Up to 6	Up to 6 x 6	Up to 8 5/8 Dia.	26	42	46
KH784	14 Sq.	12 to 14	12+ to 14 x 14	12 to 14 Dia.	28.5	42.75	70
KH785	16 Sq.	14 to 16	14+ to 16 x 16	14 to 16 Dia.	28.5	42.75	70











Dixie Poly Drum Corp.



WIRE MESH PARTITIONS & ENCLOSU

Rugged Kleton wire mesh partitions and enclosures provide maximum security at a minimal cost. Ideal for tools, valuable inventory, hazardous materials and any area of your plant where restricted access is required. Bolt-down posts and reinforced panels provide strength and rigidity for any application. Welded wire mesh panels permit full visibility and allow for unrestricted circulation of air, heat and light, providing an ideal storage facility.

Other colours are available.

FEATURES:

- 2" x 2" x 10 gauge wire mesh
- 10 gauge frame (stiffeners included on all applicable sizes)
- · Pre-drilled modular components allow for quick and easy installation
- · High visibility area
- Kleton Blue finish





WIRE MESH PARTITION COMPONENTS

Everything necessary to create your own custom enclosure. Fast and easy assembly, multiple sizes available.

Please follow these guidelines for determining the components required:

Panels - Whenever possible, stacking panels horizontally (one above the other) is more economical than placing them vertically (next to each other) - this is because fewer posts are required for wall support when panels are stacked.

EXAMPLES:

- · For an 8' high partition, stack 2 Model KD037 (4' X 8') panels horizontally
- For a 10' high partition, stack 2 Model KD037 (4' x 8') and 1 Model KD033 (2' x 8') panel horizontally
- For a 12' high partition, stack 3 Model KD037 (4' x 8') panels horizontally

Posts - A post must be placed at each end of every panel (or of every stack of panels). Use line posts between in-line panels for support, use corner posts when a 90° corner or a "T" joint is required. (Be sure to calculate an extra 2" of overall wall length for each post added). When a post meets an existing wall, add 1 KD115 wall bracket for proper support (fasteners are included with KD115 to mount to post, not to wall).

Swing Doors - All are 7' in height and include a 1' transom for a total of 8' in height. They may swing outwards to the left or to the right (except the KD112 swing door with wicket which swings open to the left only). Fasteners are includ-

Sliding Doors - All sliding doors may slide open to the left or to the right. In order to properly mount a sliding door, a post must be located on the side onto which the door slides, at the same distance away from the opening as the doors' width.

Adjustable Filler Panels - Adjustable filler panels fill in blank spots on the ends of wire mesh partitions to plug up potential security risks. Filler panels come in two sizes: 1' x 4' and 1' x 8', and slide over the ends of the existing wire mesh sections. Bolt holes on the filler panels are separated per every inch and allow the filler panel to fill in a space between 6" and 10" wide. The holes line up with holes on the existing panel which are drilled in at the top and bottom to securely fasten the filler panel in two places.

For Roof Installations - Please contact us or fax us your floor plan.

PANELS

Model	Frame	Wt.
No.	Size'	lbs.
KD121	1 x 4	10
KD120	1 x 8	21
KD030	2 x 2	10
KD031	2 x 3	11
KD032	2 x 4	12
KD033	2 x 8	31
KD034	3 x 8	40
KD035	4 x 3	20
KD036	4 x 4	23
KD037	4 x 8	45

POSTS

Model		Wt.
No.	Height	lbs.
KD052	8'3"	22
KD045	10'3"	27
KD048	12'3"	32

CORNER POSTS

Model		Wt.
No.	Height	lbs.
KD053	8'3"	22
KD046	10'3"	27
KD050	12'3"	32

ADJUSTABLE FILLER PANELS

Model		Wt.
No.	Description	lbs.
KD118	1' x 8'	10
KD119	1' x 4'	5

DOOR

Model No.	Description	Wt. Ibs.
KD106	4' x 8' Sliding Door	85
KD108	8' x 8' Sliding Door	122
KD107	8' x 10' Sliding Door	148
KD110	3' x 7' Swing Door	65
KD111	4' x 7' Swing Door	74
KD112	4' x 7' Swing Door	85
	c/w Wicket	

HARDWARE

Model		Wt.
No.	Description	lbs.
KD029	8' Door Track	16
KD028	Sliding Door Hardware Kit	6
KD115	Wall Bracket Kit	1
GD121B*	5/16" x 1" Carriage Bolt	.01
GD128B*	5/16" x 3" Carriage Bolt	.01
GD578B	Nut 5/16" Hex.	.01
KD001	3/8" x 3" Anchor Bolt	.01

*1 x GD578B is required for each GD121B & GD128B

HARDWARE REQUIRED

For Each Panel Add:

- · 4 x GD121B for each 8' long panel
- 2 x GD121B for each panel under 8' long
 1 x GD578B for each GD121B required

For Each Sliding Door Add:

- · 1 x KD028 for each sliding door (regardless of size)
- 1 x KD029 Door Track for each KD106 4' wide sliding door
- Add 2 x KD029 Door Track for each KD108 or KD107 8' wide sliding door

For Each Post Add:

KD052 add	4	Х	GD128B,	2	Х	KD001
KD053 add	8	Х	GD128B,	2	Х	KD001
KD045 add	6	Х	GD128B,	2	Х	KD001
KD046 add	12	Х	GD128B,	2	Х	KD001
KD048 add	6	х	GD128B,	2	Х	KD001
KD050 add	12	Х	GD128B,	2	Х	KD001

CURTAIN PARTITIONS

Curtain partitions screen, isolate, enclose and protect any area of any size. Commonly used in welding and paint shops, but can be used anywhere. Brackets designed for wall or ceiling mount but can be self supported by floor stands. Large selection of drape material can be utilized with any curtain.

DESIGN YOUR OWN CURTAIN


CURTAINS - Take exact length of area of enclosure and add 10% fullness for proper draping. Then multiply length & height to obtain square footage. Curtains hemmed on top and two sides 2" pocket on bottom side. Brass grommets spaced every 12". Refer to model number for square footage cost of fabric required.

TRACK - Straight and curved, straight track available in 5' and 10' lengths. Curved corners are 3' long with 2' radius welded splicer on each end included. When using a curved track, length is increased by 2'. e.g. 8' straight track with a curve at each end overall = 12'.

CARRIERS - Since curtains are made to any length be sure to add one additional carrier to actual length of curtain ordered. For example every 10' of curtain is fabricated with 11 grommets on top side. Therefore 11 carriers are required. A double carrier should be used at the beginning of each curtain. Steel roller carriers are permanently lubricated enclosed bearings.


CLAMPS - Available for flush ceiling/beam mounting and floor mounting. Clamps can also be used as track splicers. All fasten with supplied Allen bolts. Order sufficient clamps to support track every 5'. **Standards** - When free standing uprights are required, be sure to specify clamps for fastening track to angle brackets on uprights. Standards are required every 8'. Other custom heights on application.

NOTE: All standards should be lagged to floor with 5" lags and shields or welded as required (lags not included).



Model No.	Description
KB039	10 oz/sq.yd. Cotton Duck, Flame Resistant
KB040	15 oz/sq.yd. Cotton Duck, Flame Resistant
KB004	14 mil Yellow PVC, Flame Resistant
KB003	14 mil Green PVC, Flame Resistant
KB038	20 mil Clear PVC, Flame Resistant

TRACK	
Model No.	Description
KB017	5', 16 ga. Track
KB016	10', 16 ga. Track
KB029	Track Splicer
KB012	End Stop
ROLLERS	
KB013	Single Nylon Roller 25 lbs., Cap. 2 1/2" Hook
KB018	Single Steel Roller 75 lbs., Cap. 2 1/2" Hook
KB019	Double Steel Roller 125 lbs., Cap. 2 1/2" Hook
KB014	Overlap By-Pass Roller 12" Long x 2 3/4" High
WALL MOUN	TS
KB020	Wall Connector Bracket, Down
KB021	Wall Connector Bracket, Up
KB011	End Connector Fastener, Up
KB010	End Connector Fastener, Down

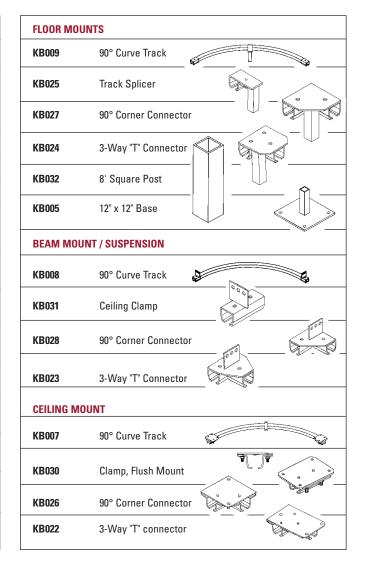

B52

STRIP CURTAIN DOORS

Everything you need in one package to install your own strip curtain door and save money!

ORDERING INFORMATION

Every strip curtain door comes complete with PVC strips and universal hardware for mounting strip curtain. Simple to follow installation instructions are included in every package.

- Determine inside width and height of door opening.
 NOTE: If mounting on door above lintel, measure from floor to mounting height.
- 2. Select type of PVC material required: STANDARD or LOW TEMP.
- Standard recommended for temperatures from 17°C to 66°C. Low Temp. recommended for interior use only for temperatures from -40°C to 37°C.
- Select from the standard sizes listed in the chart below.
 NOTE: If required size is not available, order the next largest size.
 Installation instructions describe how simple trimming can custom fit almost any door opening.
- 4. Special size doors and hanging applications are available upon request.
- 5. For overhead doors, please call one of our sales representatives for assistance.



INTERIOR DOORS



Save energy costs

 The optimal solution to open door heat/cooling loss

Reduce noise pollution

 Provides the ideal accoustical barrier around noisy equipment

CONVEYORS



Provide extra safe passage

 People can see and be seen so there's less chance of accidents

Control smoke, dust and sprays

 Strip curtains can control in-plant contaminants to improve employee environment

DOCKS



Low maintenance

- Clear flexible vinyl resists stretching and stands up to abrasion
- All aluminum hardware is used for maximum durability
- May be quickly and easily cleaned with detergents or cleansing agents that are free from abrasives
- Deep stains and ingrained dirt etc. can be removed by carefully applying ethanol



Every strip curtain door comes complete with PVC strips and universal hardware for door or wall mounting. Simple to follow installation instructions included in every package.

EASY TO ORDER

It's easy to order the strip curtain that fits your door exactly because seven standard sizes can be made to fit 95% of most door openings. Special sizes are available.

STANDARD DOOR SIZES

Strip Size	Door Openin W'x H	•	Model No. Standard	Model No. Low Temp.
8"	4 x 7	25	KF022	KF004
(8" x .080)	5 x 8	35	KF023	KF005
	6 x 8	3 40	KF024	KF006
12"	8 x 8	80	KF026	KF008
(12" x .120)	8 x 10	0 100	KF025	KF007
	10 x 10	0 125	KF020	KF002
	12 x 12	2 175	KF021	KF003

NOTE: Doors with 8" strips have 2" standard overlap.

Doors with 12" strips have 4" standard overlap.

REPLACEMENT STRIPS - 5 PER CARTON

Strip	Wt.	Model No.	Model No.
Size	Ibs.	Standard	Low Temp.
8" x .080 x 8'	15	KF032	KF013
12" x .120 x 12'	45	KF029	KF011

BULK ROLLS

Strip Size	Roll'	Wt.	Model No. Standard	Model No. Low Temp.
8" x .080	300	99	KF033	KF014
2" x .120	200	150	KF030	KF012

SAFETY GUARDS & BOLLARDS

PERIMETER GUARDS

- Create your own barrier guards with 2 styles to choose from: 2" x 2" welded wire mesh or 2" square tube
- Both feature a unique 49 1/2" overall height, and are easily installed
 Posts are constructed of 2" square tube with 5/16" base plate with holes for anchoring to floor
- · Colour: Safety yellow





Model		0	imensi	ons	Wt.
No.	Description	W	х	Н	lbs.
MESH ST	YLE				
KD129	Post		4:	9 1/2"H	13
KD130	Mesh Panel	4'	Х	4"	20
KD131	Mesh Panel	8'	Х	4"	39
TUBULA	R STYLE				
KD132	Starter Section	4'	х	49 1/2"	45
KD133	Add-On Section	4'	Х	49 1/2"	32
KD134	Starter Section	8'	Х	49 1/2"	66
KD135	Add-On Section	8'	Х	491/2"	53

Note: Hardware to attach add-on sections is included.

HARDWARE REQUIRED

Model No.	Description				
FOR MESH STYLE					
KD001	Floor Anchors (2 per post)				
GD128B	5/16" x 3" Carriage Bolt (4 per frame)				
GD578B	5/16" Hex Nut (1 nut for each GD128B)				
KD116	Post Caps (1 per post)				
FOR TUBUL	AR STYLE				
KD001	Floor Anchors (4 per starter section / 2 per add-on section)				
KD116	Post Caps (1 per post)				

SAFETY GUARDS

- · Protect your equipment and personnel from accidental damage and injury with these low profile safety guards
- 4"x 4" square tube welded to an 8" x 8" x 1/2" base, complete with four 1" diameter holes for anchoring to floor







Model	Dimensions		Wt.	
No.	L"	X	Н"	lbs.
KD127	24	Х	18	65
KD128	48	Х	18	85
KD136	24	Х	42	100
KD139	48	Х	42	120

HEAVY DUTY STEEL BOLLARDS

- Protect your warehouse equipment, as well as high traffic areas with these heavy-duty steel bollards
- 4" x 4" square tube welded to an 8" x 8" x 1/2" steel base, complete with four 1" diameter holes for anchoring to floor
- · Colour: Safety yellow

Model No.	Height"	Wt. lbs.
KD125	24	30
KD126	48	50



B54

HEATERS & FANS

RADIANT PLUG-IN **UNDER DESK HEATER**

- Safe comfortable radiant heat
- Extremely economical to operate only draws 1.4 A
- Will not effect computer work stations
- Includes velcro tabs and wire support hardware for easy installation
- Lighted on-off kick switch
- Built-in safety tip-over switch

Model No. BA960



Volts	Watts	Amps	Dim"
120	170	1.4	15 x 22 x 1

Fahrenheat.

PORTABLE FAN FORCED/RADIANT **UTILITY HEATER**

- Three heat settings provide fuller comfort and efficient operation
- 600 W radiant, 900 W fan forced
- 1500 W fan forced and radiant Chrome-plated safety grille Automatic built-in thermostat Ceramic core element
- Tip over safety switch and thermal limit

Model No.	Volts	Watts	BTU/H	Amps
BA963	120	600/900/1500	2048/3072/5120	5.0/7.5/12.5

PORTABLE OPEN COIL HEATER

- Two heat settings (1500 W and 1000 W)
- Provides full comfort and efficient operation



			A Division of Marky Engineered Products	
Model No.	Volts	Watts	BTU/H	Amps
BA967	120	1000/1500	3410/5120	8.3/12/5

Fully adjustable automatic thermostat Safety overload switch Power signal light Top mounted handle and controls Grounded plug and controls

INDUSTRIAL GRADE, HIGH **VOLUME BELT-DRIVE DRUM**

FANS

High volume, heavy-duty portable air circulators are ideal for cooling warehouses, garages, workshops and other similar buildings. Heavy-gauge, sturdy steel construction provides durability. Large rubber wheels and two handles for easy movement. Complete with 10' grounded cords. CUL approved.







Model	Drive	Blade			Max		Wt.
No.	Туре	Size"	Volts	HP	Amps	CFM	lbs.
EA108	Belt	36	120	1/2	8	14,800	111
EA109	Belt	42	120	3/4	10.8	18,000	132
NI275	Belt	48	120	1	15	23,000	153

AIR CONDITIONERS

Highly efficient whisper quiet models are designed for dependable long life use.

- Compact design fits most windows
- 3-setting thermostat
- 2-speed fan
- Washable rigid filter



Model		Remote	EER			Dimensions			Wt.
No.	BTU	Control	Cooling	W"	х	D"	х	Н"	kg
BB117	5,200	No	10	17.5	Х	15.7	х	12.6	29
EA234	6,200	Yes	9.7	17.5	Х	15.7	Х	12.6	30
EA081	8,000	Yes	9.7	17.7	Х	21.1	Х	13.6	35
EA235	10,200	Yes	10	22	Х	25.6	Х	15.7	51
EA084	12,000	Yes	9.8	26	Х	25.6	Х	17.1	59

DELUXE PORTABLE FAN FORCED UTILITY HEATER

- Two heat settings provide full comfort and economic operation
- Automatic built-in thermostat
- Fan only setting
- Tip over safety switch and thermal limit control
- Built-in carrying handle and front safety guards
- Safety buzzer sounds if unit is tipped over
- Grounded cord and plug
- Chrome plated carry handle and front guards

Vlodel No.	Volts	Watts	BTU/H	Amps
3A965	120	1300/1500	4437/5120	10.8/12.5

c(UL)us

CONTRACTOR HEATER

- Built-in thermostat
- Safety high temperature limit
- Steel spiral fin brazed to metal sheath elements for maximum heat transfer
- 6' heavy-duty cord
- Built-in handle/cord storage
- Permanently lubricated motor

Model No.	Volts	PH	Watts	BTU/H	Amps	Plug Type	Wt. lbs.
EA005	240/208	1	4800/3600	16,380/12,285	20.0/17.3	#6-30P	17

UMARK

FAHRENHEAT HEAVY-DUTY CEILING MOUNT HEATER

- Multi wattage covering 2500-5000 W (2500 W, 3332 W, 4165 W, 5000 W)
- Rugged heavy-duty industrial heater
- Ideal for use in barns, storage rooms, workshops, garages, warehousing
- Built-in ceiling bracket for easy mounting
- Automatic fan delay
- 240 V

Model No. EA012

Fahrenheat

FAN-FORCED COMPACT UNIT HEATER

Mounts on walls or from ceilings as a source of primary or spot heating. Airflow can be directed horizontally, vertically, or at any angle in between for precise control.

- Can be used with both 240 and 208 volts
- Multiple wattage selector switch
- Fan only setting
- Built-in bi-metal thermostat
- Completely enclosed fan motor



CHARK * A Division of Martly Engineered Products	100

No.	Volts	Watts	BTU/H	Amps	lbs.
EA135	240	5000/3333	17060/11372	21/14	28
	208	3750/2500	12795/8530	18/12	

18" FLOOR FAN

- 18" floor fan is ideal for different areas, from the store to the warehouse and for offices where air circulation is needed
- 3-prong plug with heavy-duty ground industrial wire
- Rear mounted controls
- Powerful, quiet 3-speed motor
- Rotates up for vertical airflow
- 120 V

Model No. BB116









- Slim line
- 5 slim blades
- 3-speed whisper quiet operation
- Durable steel body No tools required for assembly

Model No. BA330











AIR CIRCULATING EQUIPMENT

AIR CIRCULATING FANS

- Effectively cools large areas in factories, offices, stores, cafeterias and other public places
- Provide relief from heat by creating gentle movements of air
- 2 speeds, 120 V, ball bearing totally enclosed permanently lubricated permanent split capacitor with
- Built-in thermal overload protection included
- Fan heads are available on an adjustable pedestal base or a rugged wall mount
- The heavy gauge 27" steel dome base is connected with 5 carriage bolts and is adjustable from 48 7/8" to 74 5/8" high
- The one-piece rigid wall mount bracket can be installed on wood, metal or concrete (hardware not included)
- Precision balanced coated steel blades
- Double locking chrome plated fan guards
- 3-conductor SJT type cord for added safety
- Meets OSHA standards, UL and ULC listed

INDUSTRIAL AIR CIRCULATORS (NON OSCILLATING)

1/4 hp 2 -speed motors

Fan head tilt - Pedestal: 10° down or 28° up. Wall mount: 40° down or 0° up.

Pedestal Model No	Wt. lbs.	Wall Mount Model No	Blade Size"	Volts	НР	Max Amps	CFM High-Low
NI225	73	NI251	24	120	1/4	2.2	7000-5900
N1070	78	N1083	30	120	1/4	2.5	8200-6200

INDUSTRIAL AIR CIRCULATORS (OSCILLATING)

1/4 hp 2 -speed motors

Oscillates in 90° arc or can be locked in a fixed position Fan head tilt: Pedestal or wall mount: 15° up or down.

Pedestal	Wt.	Wall Mount	Blade			Max	CFM
Model No	lbs.	Model No	Size"	Volts	HP	Amps	High-Low
NI252	75	NI249	24	120	1/4	2.2	7000-5900
N1080	84	N1250	30	120	1/4	2.5	8200-6200

HIGH PERFORMANCE AIR CIRCULATORS

1/3 hp 2 -speed motors

Fan head tilt - Pedestal: 10° down or 28° up. Wall mount: 40° down or 0° up.

Pedestal Mount	Wall Mount	Blade	Fan			Max.	CFM	
Model No.	Model No.	Size"	Head	Volts	HP	Amps	High-Low	
EA131	EA132	24	MACH24	120	1/3	2.6	7100-6000	
EA133	EA134	30	MACH30	120	1/3	2.8	8900-6900	









LEADING EDGE CEILING FANS

Ceiling fans will recirculate warm air and heat from the ceiling and push it down. In summer a ceiling fan system supplements air-conditioned areas by reducing the temperature. They will save energy and cut fuel costs. Adjustable speed control not included.

HEAVY-DUTY COMMERCIAL CEILING FANS

- 36" fan is designed for smaller areas
- Ideally suited for isolated areas and as a supplemental cooling fan

HEAVY-DUTY INDUSTRIAL CEILING FANS

- 56" fan for spacious applications where maximum area coverage is required
- For both heat destratification and summertime cooling
- Powerful, heavy-duty motor for mounting heights to 45 feet



REVERSIBLE CEILING FAN

- Patented dual pitch fan provides identical airflow volume in either forward or reverse rotation
- Ideally suited for exhausting stale air and condensation removal
- For industrial applications with mounting heights of 10' or higher

Model	Blade	Max		* Area Coverage	Wt.		
No.	Size"	Volts	CFM	Per Fan	lbs.		
COMM	ERCIAL	CEILING	FANS				
NI271	36	120	12,500	1600 sq. ft.	20		
NI272	48	120	21,000	2025 sq. ft.	22		
INDUS	TRIAL C	EILING I	FANS				
BA318	56	120	27,500	3800 sq. ft.	24		
BA319	60	120	46,000	5000 sq. ft.	30		
REVER	SIBLE CI	EILING F	AN				
BA320	56	120	27,000	3800 sq.ft.	24		
*Area cov	*Area coverage rated for heat destratification at 20' blade mounting height.						

ECONOMICAL CEILING FANS

Prevent heat loss in your plant, cut fuel costs by up to 30% and increase employee productivity with these economical ceiling fans.

For: manufacturing plants, warehouses, repair shops, aircraft hangers, restaurants, indoor tennis courts, auditoriums.

- · Recirculates hot air and heat from ceiling down to floor and work area
- Use wasted heat from production processes and lighting systems
- · Air movement in summer reduces humidity and temperature 8° (chill effect)

Readily installed, uses 110 V/60 Hz

Model	del Fan CFM		Floor Area
No.	Dia."	Air Del.	Covered
BA152	36	7,100	600 cu.ft.
BA154	48	13,000	900 cu.ft.
BA156	56	20,500	1,500 cu.ft.
CONTE	OI C		

CONTROLS

BA186	Variable Speed	Controls 1 Fan
BA187	Variable Speed	Controls up to 3 Fans
BA185	Variable Speed	Controls up to 10 Fans

CEILING FAN GUARD

- · Totally encloses 56" and 60" diameter fans
- · Mounts directly to fan rod with no air flow interruptions
- Vinyl coated
- Safety cable attachment 3/32", 7 x 7 galvanized aircraft cable and 920 lbs. breaking strength
- Twelve spoke cross bar construction 5 ga. (.207) radial, 5 ga. (.207) on 3" centres

Model No. BA327



- · Manufactured to UL specifications
- For single and multiple fan installations

Model			# of Ceiling Fans Contro		
No.	Volts	Amps	56" Blade	60" Blade	
BA323	120	3	2	1	
BA324	120	6	5	3	
BA325	120	8	6	4	
BA326	120	12	10	8	

18871E B56

EXHAUST FANS & PANEL FANS

WALL EXHAUST FAN

- Sturdily constructed, direct drive, horizontal discharge for
- industrial, commercial and farm applications Constructed from all-aluminum extrusions
- Heavy-duty OSHA motor mount/guard
- Ball-bearing with overload protection Aluminum shutters automatically open
- when fan starts and close when fan stops
- Complete with aluminum shutters

Exhaust Fan



EXHAUST SERIES

The Exhaust series comes equipped with aluminum louvres which opens automatically when fan is operating.

EXHAUST

Model		Dime	nsions				
No.	A"	В"	C"	D"	RPM	HP	CFM
STAN	IDARD)			FREE AI	R	
BA129	17	14	6 3/4	11 1/2	1725	1/4	1450
BA132	18 3/4	15 3/4	6 3/4	11 1/2	1725	1/4	2200
BA135	20 3/4	17 3/4	6 3/4	11 1/2	1725	1/4	3300
BA138	22 3/4	19 3/4	6 3/4	11 1/2	1725	1/4	4300
BA141	24 3/4	21 3/4	6 3/4	12 1/4	1725	1/3	5000
2-SPI	EED				FREE AI	R	
BA130	17	14	6 3/4	11 1/2	1725/1140	1/4	1450/1000
BA133	18 3/4	15 3/4	6 3/4	11 1/2	1725/1140	1/4	2200/1450
BA136	20 3/4	17 3/4	6 3/4	11 1/2	1725/1140	1/4	3300/2100
BA139	22 3/4	19 3/4	6 3/4	11 1/2	1725/1140	1/4	4300/2850
BA142	24 3/4	21 3/4	6 3/4	12 1/4	1725/1140	1/3	5000/3250
BA495	28 3/4	25 3/4	6 3/4	12 1/4	1100/800	1/3	5000/3000

PANEL FANS

- Sturdily constructed, direct drive, horizontal discharge for industrial, commercial and farm applications
- Motors are totally enclosed, continuous run, fan duty with built-in automatic overload protection
- Ball bearing motors for easy maintenance
- 120 V, other voltages available on request
- Baked enamel finish
- Motor CSA approved

Panel Fan

PANEL SERIES Used when moving air within an enclosed area

PANEL


		- n.		
Fan	Model	Dime:	nsions	
Dia."	Dia." No.		В"	
STA	NDARD			
12	BA059	17	11 1/2	
14	BA062	18 3/4	11 1/2	
16	BA064	20 3/4	11 1/2	
18	BA067	22 3/4	11 1/2	
20	BA070	24 3/4	12 1/4	

Fan	Model	Dime	nsions				
Dia."	Dia." No.		No. A"		В"		
2-SP	EED						
12	BA482	17	11 1/2	Т			
14	BA483	18 3/4	11 1/2				
16	BA484	20 3/4	11 1/2				
18	BA485	22 3/4	11 1/2				
20	BA486	24 3/4	12 1/4				
24	D A 407	20.2/4	10 1/4				

FAN GUARDS

The use of fan guards is compulsory unless the fan is installed out of reach at least 8 feet from the floor or ground.

Model No.
BA496
BA497
BA498
BA499
BA500
BA501





SMOKE EJECTORS

- Remove smoke, welding fumes and undesirable contaminants from the air or bring clean air in
- Reversible smoke ejectors are equipped with a totally enclosed ball bearing motor with automatic overload protection
- Units are CSA approved
- Explosion proof models in accordance with Class 1 Group D/Class II Group EFG
- All are 115 V AC, 1/3 HP, 1725 RPM equipped with a 6' power cord, cord holder and cadmium plated protection guards
- Hoses are fire safe, single ply, PVC fabric with a

Opin	ig will flolix								
Model		CFIV	1				Fan D	im.	
No.	Туре	@.10" SP	Fan Dia."	L"	х	W"	Х	Н"	
BA099	Standard	1620	12	16	Х	14 5/8	Х	14 5/8	
BA100	Exp. Proof	1620	12	16	Х	14 5/8	Х	14 5/8	
BA101	Standard	3050	16	13 5/8	Х	18 1/2	Х	18 1/2	
BA102	Exp. Proof	3050	16	13 5/8	Х	18 1/2	Х	18 1/2	
BA103	Standard	3700	18	14 3/8	Х	21	Х	21	
BA104	Exp. Proof	3700	18	14 3/8	Х	21	Х	21	

COLLAR ADAPTORS

00==/ /	
Model	Fan
No.	Dia"
BA026	12
BA028	16
BA029	18

ELEVIRI E HOSES

FEEKIBLE HOOLS				
Model	Fan	Fan		
No.	Length'	Dia."		
BA049	15	12		
BA050	20	16		
BA051	20	18		

OFFICE FANS

- All around general purpose fans are light duty
- Best suited for office environments 3-speed oscillating except for EA068 which is 2-speed non-oscillating

Model	
No.	Description"
EA068	6 Clip-on/Desk
BA175	12 Desk
EA070	16 Desk
EA071	16 Pedestal
EA072	16 Pedestal w/remote
BA778	18 Pedestal





INDUSTRIAL ROLLAIRE MODEL CART MOUNTED 8" FAN

- Ideal for manufacturing, warehouses, workstations, etc.
- Cart features 5" diameter plastic wheel
- Cart height is fully adjustable from 33" to 50"
- 18" fan head is 3-speed
- Energy efficient draws only 2.6 Amps Specifications:

CFM: 5500 - high speed,

- 4600 medium speed. 3500 - low speed Motor: 1/8 HP
- Weight: 24 lbs.

Model No. EA041





20" COMMERCIAL AIR CIRCULATOR

- Ideal for offices, retail, banks, hotels, etc.
- Energy efficient draws only 2.1 Amps
- Rugged all metal construction adjustable height up to
- Pull chain switch 3-speed control
- Double locking guard for safety
- 72" grounded power cord
- cULus approved and also meets OSHA standards specifications
- CFM: 5950 high speed, 3500 low speed Motor: 1/6 HP drip proof
- Weight: 32 lbs. Model No. EA009





BALANCERS & REELS

BALANCERS

- Designed to enhance productivity, comfort and safety
- Protect tools from being damaged
- Aircraft (steel/nylon) cable and a standard 360° swivel hanger
- · No force required to maintain load, light force to position load
- · Installed easily in minutes
- Recommended that a secondary support chain/cable be attached to equipment suspended overhead

Model No.	Mfg. No.	Locking Model No.	Mfg. No.	Capacity Ibs.	Cable Travel ft'	Duty
FA124	GM-31	-	-	1-12	4.8	Light
FA125	RB2	-	-	1-2	5.2	Light
FA126	RB4	-	-	2-4	5.2	Light
FA127	RF6	FA128	RFL6	4-6	6.6	Light
FA129	RF8	FA130	RFL8	6-8	6.6	Light
FA131	BF9	FA132	BFL9	6-9	6.6	Light
FA133	BF13	FA134	BFL13	9-13	6.6	Light
FA135	BF18	FA136	BFL18	13-18	6.6	Light



AUTOMATIC REWIND AIR HOSE REELS

- 300 PSI/20 Bar maximum working pressure
- 3/8" ID hose
- 3' lead-in supply hose
- Automatic locking mechanism maintains the desired length of hose Quick release on bracket allows reel to be removed for on site use

ded)	includ	re ir	(Hardwar	mount	wall	or	Ceiling	•
t	includ	are ir	(Hardwar	mount	wall	or	Ceiling	•

Model No.	Hose Length'	Connections"	Wt. lbs.
FH461	25	1/4 brass NPT	10.2
FH462	50	3/8 brass NPT	18.0

MANUAL REWIND AIR HOSE REELS

- All weather design for indoor or outdoor use
- Rugged unitised bolted construction
- Heavy gauge steel reel frame, spool, and drum
- Drag spring reduces self-unwinding Holds 3/8" ID hose (Sold separately)
- 3/8" brass NPT fittings
- 250 PSI/16.7 Bar maximum working pressure
- Corrosion resistant powder coated finish
- Heavy gauge welded mounting bracket (Hardware included)

Model No.	Length'	Wt. Ibs.
FH463	50	9.7
FH464	100	13.2

HOSE REELS

- Can position for wall, floor, ceiling or truck mounting
- Permanently lubricated
- Full flow shaft and swivel connection assures max product delivery
- Flexible hose connection required between source hose and reel inlet to prevent misalignment
- Adjustable hose bumpers allows to maintain any length of hose outside the reel
- 4 bolt mounting base for easy installation
- Low pressure (300 PSI) small capacity for general air or water, standard hose included, maximum temperature 150°F

Model	Mfg.		Max	Hose	Hose	Hose	Hose	Reel	[Dime	nsions		
No.	No.	Series	PSI	Length'	ID"	OD"	Outlet"	Inlet"	L"	Х	W"	х	H"
TN315	4435-0LP	4000	300	35	1/4	.500	1/4	3/8	12 5/8	Х	5 3/8	Х	12 7/8
TN316	5635-OLP	5000	300	35	3/8	.688	1/4	3/8	13 3/4	Х	6	Х	14 1/2
TN317	4625-OLP	4000	300	25	3/8	.688	1/4	3/8	12 5/8	Х	5 3/8	Х	12 7/8
TN318	7650-0LP	7000	300	50	3/8	.688	1/4	1/2	19	Х	7	Х	20 1/4
TN319	7850-0LP	7000	300	50	1/2	.844	3/8	1/2	19	Х	7	Х	20 1/4
TN320	D9375-OLP	9000	300	75	3/4	1.188	3/4	1	24 1/4	Х	12	Х	26 1/4

LIGHTWEIGHT & ECONOMICAL INDUSTRIAL REELS

- Lighter spring driven hose reel designed for applications that are less demanding, yet require a product that can withstand industrial use
- Steel components are individually powder coated and teamed with composite materials, which virtually eliminates corrosion

STEEL & COMPOSITE REELS

Model	Drive	Hose	Hose	Max	Hose	Reel		Dimensions		Shipping
No.	Туре	I.D."	Length'	PSI	Outlet"	Inlet"	Depth	Width	Height	Wt (lbs)
						(M)NPT	(F)NPT			
LIGHTW	EIGHT FOR AIR	or WATER	- designed	for less de	manding appl	ications yet	can withsta	and industria	l use - sold	with hose
FH522	Spring	1/4	35	300	1/4	3/8	16 1/2	5 3/4	17 5/8	22
FH523	Spring	3/8	25	300	1/4	3/8	16 1/2	5 3/4	17 5/8	25
FH524	Spring	3/8	35	300	1/4	3/8	16 1/2	5 3/4	17 5/8	23
FH525	Spring	3/8	50	300	1/4	3/8	16 1/2	6 1/4	17 5/8	29
2-Year L	imited Warrant	y Standaı	rd colour as	shown - bl	ack composit	e / powder c	oat paint re	ed base & gu	ide arm	







TN318

19594E B58

KLETON MODU-WORKBENCHES

HEAVY-DUTY WORKBENCHES

CREATE A BENCH FOR YOUR APPLICATION!

- Variety of tops: 14-gauge steel wood filled, laminated wood, shop top and plastic laminate
- Wide range of top sizes from 24" x 60" up to 36" x 72"
- Variety of six pedestals to choose from with working heights of 31" or 34"
- All welded 14-gauge steel legs 22" or 28" deep with a working height of 34", comes standard with electrical duplex knockouts
- Three-piece 14-gauge steel stringer provides stable work surface for all sizes of benches
- Options: Riser shelves, drawers, back stops & end stops, lower shelves, cam locks and leg extensions
- Capacities range from 1000 lbs. to 3000 lbs.
- All mounting hardware included and shipped knocked down
- Powder coated Kleton light grey



Model		Wt.
No.	Description	lbs.
FF912	Single pair of legs, 32 1/4"H x 22"D	14
FF913	Single pair of legs, 32 1/4"H X 28"D	15
FF914	KIT - 2 x FF912 and 1 x FF979	35
FF916	KIT - 2 x FF913 and 1 x FF979	35
FF920	Bench leg gussets (pr.)	2
FF915	Mobile KIT - 2 x FF912, 1 x FF979, casters	40
FF917	Mobile KIT - 2 x FF913, 1 x FF979, casters	40
FF979	Universal stringer	11
FF934	Lower Shelf, for 48" top	14
FF935	Lower Shelf, for 60" top	16
FF936	Lower Shelf, for 72" top	18
FF956	Riser Shelf, 9" x 48"	19

*Note: 22" D bench legs fit tops 24" D 28" D bench legs fit tops 30" and 36" D

MODU-WORKBENCH TOPS

STEEL WOOD-FILLED TOP:

- Heavy-duty 14-gauge steel with formed edges
- Reinforced wood core for sound and strength
- Overall thickness 1 3/4"
- Colour: Kleton light grey

LAMINATED WOOD TOP:

- Heavy-duty hardwood top
- Solid maple laminations Overall thickness 1 3/4"

SHOP TOP:

- For medium-duty applications
- 3/8" double sealed resin custom board covers solid 1" hardwood core
- Overall thickness 1 3/4"

PLASTIC LAMINATE TOP:


- Light-duty top with smooth white leather plastic laminate face covers 45-lbs density particle board
- Overall thickness 1 5/8"

		Model	Wt.
TOP TYPE	Size"	No.	lbs.
	24 x 60	FD031	72
	30 x 60	FD033	92
	30 x 72	FD034	110
Steel	36 x 60	FD035	108
Wood-Filled	36 x 72	FD036	120
WOOU-Filleu			
	24 x 60	FD016	70
	30 x 60	FD020	88
	30 x 72	FD021	105
Laminated	36 x 60	FD026	105
Wood	36 x 72	FD027	126

	30 x 30	FD004	88
	30 x 72	FD005	105
Shop	36 x 72	FD007	126
Тор			
	30 x 30	FD011	72
	30 x 72	FD011	86
Plastic	36 x 72	FD014	126
Laminate			

^{*} Other sizes are available

If you don't see the workbench configuration that suits your needs give us a call. We can custom build to your requirements.

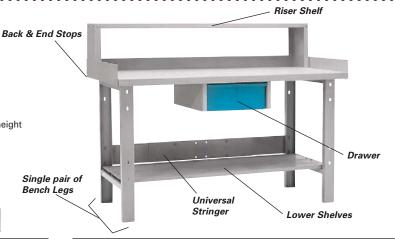

Model		Wt
No.	Description	lbs.
FF957	Riser Shelf, 9" x 60"	24
FF958	Riser Shelf, 9" x 72"	29
FF704	Back Stop, 3" x 48"	8
FF705	Back Stop, 3" x 60"	10
FF708	Back Stop, 3" x 72"	12
FF792	End Stop, 3" x 24"	4
FF793	End Stop, 3" x 30"	5
FF794	End Stop, 3" x 36"	6
FH473	Drawer, 18" x 21"	21
FH476	Cam lock w/pair of keys for drawers	1.0
FG732	Leg Extensions to make height adjustable from 34"-39"	
	- in 1" increments (set of 4)	

KLETON MODU-WORKBENCH **PEDESTALS**

- Made from all welded heavy gauge steel; 18" W x 21" D x 29 1/4" H $\,$ Full extension drawers' capacity: 100 lbs. per drawer
- Optional bases add height, 3" increments
- (maximum 2 bases per pedestal)
- Large drawers: 14 1/2" W x 20 1/2" D x 4 1/4" H Small drawers: 14 1/2" W x 20 1/2" D x 2 1/4" H
- Doors 16" W x 24" H with adjustable interior shelf
- Doors are reversible, can be opened on
- either right or left side Doors and drawers have knockouts for optional locks
- All bench configurations assume installation of one base
- Any bench using a leg/pedestal combination
- requires one pedestal base for equal height
- Keyed alike cam locks available
- All mounting hardware included





FH471

Model No.	Description	Wt. lbs.
FH467	Single Door Pedestal	48
FH471	2 Door Pedestal	48
FH469	2-Large Drawer, Half Door Pedestal	59
FH468	4-Large Drawer Pedestal	75
FH472	4-Small Drawer, Half Door Pedestal	63
FH470	4-Small and 2-Large Drawer Pedestal	94
FH474	3" Base for Pedestal	4.5
FH475	Cam lock for doors	0.2
FH476	Cam lock for drawers	1.0
FH484	Cam lock for doors, keyed alike	0.2
FH485	Cam lock fo drawers, keyed alike	1.0

19595E

B59

INDUSTRIAL GRADE WORKBENCHES KLETON





Size" Ibs. N							
	υ.						
STEEL - WOOD FILL	STEEL - WOOD FILL						
36 x 72 155 FI	F672						
36 x 60 143 FI	F671						
30 x 72 145 FI	F670						
30 x 60 127 FI	F669						
24 x 60 107 FI	F667						
LAMINATED WOOD							
36 x 72 161 FI	F658						
36 x 60 140 FI	F657						
30 x 72 140 FI	F656						
30 x 60 123 FI	F655						
24 x 60 105 FI	F653						

Тор	Wt.	Model
Size"	lbs.	No.
SHOP TO	P	
36 x 72	161	FF679
-	-	-
30 x 72	140	FF677
30 x 60	123	FF676
-	-	-
PLASTIC	LAMINA'	ΤE
36 x 72	161	FF665
-	-	-
30 x 72	121	FF663
30 x 60	107	FF662



Top Size"	Wt. Ibs.	Model No.	Top Size"	Wt. lbs.	Model No.
STEEL - WOOD FILL			SHOP TO	Р	
36 x 72	191	FF707	36 x 72	197	FF715
36 x 60	175	FF706	-	-	-
30 x 72	181	FF703	30 x 72	172	FF713
30 x 60	159	FF702	30 x 60	155	FF712
24 x 60	139	FF700	-	-	-
LAMINATED WOOD			PLASTIC	LAMINA	ΓΕ
36 x 72	197	FF691	36 x 72	197	FF698
36 x 60	172	FF690	-	-	-
30 x 72	176	FF689	30 x 72	153	FF696
30 x 60	155	FF688	30 x 60	139	FF695
24 x 60	137	FF686		-	-



Top Size"	Wt. Ibs.	Model No.	Top Size"	Wt. Ibs.	Model No.
STEEL - \	NOOD FII	L	SHOP TO	P	
36 x 72	212	FG293	36 x 72	218	FG296
36 x 60	196	FG292	-	-	-
30 x 72	202	FG291	30 x 72	193	FG295
30 x 60	180	FG290	30 x 60	176	FG294
24 x 60	160	FG289	-	-	-
LAMINATED WOOD			PLASTIC	LAMINA	TE
36 x 72	218	FG285	36 x 72	218	FG288
36 x 60	193	FG284	-	-	-
30 x 72	197	FG283	30 x 72	174	FG287
30 x 60	176	FG282	30 x 60	160	FG286
24 x 60	158	FG281	-	-	-



Top Size"	Wt. " Ibs.						
STEEL - WOOD FILL							
36 x 72	177	FG261					
36 x 60	165	FG260					
30 x 72	167	FG259					
30 x 60	149	FG258					
24 x 60	129	FG257					
LAMINA	TED WOO	D					
36 x 72	183	FG253					
36 x 60	162	FG252					
30 x 72	162	FG251					
30 x 60	145	FG250					
24 x 60	127	FG249					

Тор	Wt.	Model
Size"	lbs.	No.
SHOP TO	P	
36 x 72	183	FG264
-	-	-
30 x 72	162	FG263
30 x 60	145	FG262
	-	-
PLASTIC	LAMINA	TE
36 x 72	183	FG256
-	-	-
30 x 72	143	FG255
30 x 60	129	FG254
-	-	-



Top Size"	Wt. lbs.	Model No.	Top Size"	Wt. lbs.	Mode No.
	NOOD FIL		SHOP TO		140.
36 x 72	192	FG109	36 x 72	198	FG116
36 x 60	180	FG108	-	-	-
30 x 72	182	FG107	30 x 72	177	FG114
30 x 60	164	FG106	30 x 60	160	FG113
24 x 60	144	FG104	-	-	-
LAMINA	TED WOO	D	PLASTIC	LAMINA'	ΤE
36 x 72	198	FG095	36 x 72	198	FG102
36 x 60	177	FG094	-	-	-
30 x 72	177	FG093	30 x 72	158	FG100
30 x 60	160	FG092	30 x 60	144	FG099
24 x 60	142	FG090	-	-	-



Тор	Wt.	Model	Тор	Wt.	Model	_
Size"	lbs.	No.	Size"	lbs.	No.	
STEEL - WOOD FILL			SHOP TO	P		
36 x 72	206	FG277	36 x 72	212	FG280	_
36 x 60	194	FG276	-	-	-	
30 x 72	196	FG275	30 x 72	191	FG279	
30 x 60	178	FG274	30 x 60	174	FG278	
24 x 60	158	FG273	-	-	-	
LAMINATED WOOD			PLASTIC	LAMINA	TE	
36 x 72	212	FG269	36 x 72	212	FG272	_
36 x 60	191	FG268	-	-	-	
30 x 72	191	FG267	30 x 72	172	FG271	
30 x 60	174	FG266	30 x 60	158	FG270	
24 x 60	156	FG265	-	-	-	



Тор	Wt.	Model					
Size"	lbs.	No.					
STEEL - WOOD FILL							
36 x 72	260	FG229					
36 x 60	248	FG228					
30 x 72	250	FG227					
30 x 60	232	FG226					
24 x 60	212	FG225					
LAMINAT	LAMINATED WOOD						
36 x 72	266	FG221					
36 x 60	245	FG220					
30 x 72	245	FG219					
30 x 60	228	FG218					
24 x 60	210	FG217					

Тор	Wt.	Model
Size"	lbs.	No.
SHOP TO	P	
36 x 72	266	FG232
-	-	-
30 x 72	226	FG231
30 x 60	212	FG230
	-	-
PLASTIC	LAMINA	TE
36 x 72	266	FG224
-	-	-
30 x 72	226	FG223
30 x 60	212	FG222
	-	-



Top Size"	Wt. lbs.	Model No.	Top Size"	Wt. lbs.	Mode No.
STEEL - \	NOOD FII	L	SHOP TO	P	
36 x 72	231	FG137	36 x 72	237	FG144
36 x 60	219	FG136	-	-	-
30 x 72	221	FG135	30 x 72	216	FG142
30 x 60	203	FG134	30 x 60	199	FG141
24 x 60	183	FG132		-	-
LAMINA	TED WOO	D	PLASTIC	LAMINA	TE
36 x 72	237	FG123	36 x 72	237	FG130
36 x 60	216	FG122	-	-	-
30 x 72	216	FG121	30 x 72	216	FG128
30 x 60	199	FG120	30 x 60	199	FG127
24 x 60	181	FG118	-	-	-



Тор	Wt.	Model	Тор	Wt.	Model
Size"	lbs.	No.	Size"	lbs.	No.
STEEL - \	NOOD FIL	L	SHOP TO	P	
36 x 72	232	FG245	36 x 72	238	FG248
36 x 60	220	FG244	-	-	-
30 x 72	222	FG243	30 x 72	217	FG247
30 x 60	204	FG242	30 x 60	200	FG246
24 x 60	184	FG241	-	-	-
LAMINA	TED WOO	D	PLASTIC	LAMINA	ΓΕ
36 x 72	238	FG237	36 x 72	238	FG240
36 x 60	217	FG236	-	-	-
30 x 72	217	FG235	30 x 72	198	FG239
30 x 60	200	FG234	30 x 60	184	FG238
24 x 60	182	FG233	-	-	

13322E **B60**

WORKBENCHES & WORKSTATIONS



Тор	Wt.	Model	Тор	Wt.	Mode	
Size"	lbs.	No.	Size"	lbs.	No.	
STEEL - V	NOOD FIL	L	SHOP TOP			
36 x 72	261	FG624	36 x 72	267	FG629	
36 x 60	249	FG625	-	-	-	
30 x 72	251	FG626	30 x 72	227	FG63	
30 x 60	233	FG627	30 x 60	213	FG63	
24 x 60	213	FG628	_	-	-	
LAMINA	TED WOO	D	PLASTIC	LAMINAT	ſΕ	
36 x 72	267	FG619	36 x 72	267	FG63	
36 x 60	246	FG620	-	-	-	
30 x 72	246	FG621	30 x 72	227	FG63	
30 x 60	229	FG622	30 x 60	213	FG63	
24 x 60	211	FG623	-	-	-	



Top Size"	Wt. lbs.	Model No.	Top Size"	Wt. Ibs.	Model No.	
STEEL - V	VOOD FIL	L	SHOP TO	Р		
36 x 72	265	FG464	36 x 72	271	FG469	
36 x 60	253	FG465			-	
30 x 72	255	FG466	30 x 72	231	FG470	
30 x 60	237	FG467	30 x 60	217	FG471	
24 x 60	217	FG468	-	-	-	
LAMINAT	ED WOO	D	PLASTIC LAMINATE			
36 x 72	271	FG459	36 x 72	271	FG472	
36 x 60	250	FG460		-		
30 x 72	250	FG461	30 x 72	231	FG473	
30 x 60	233	FG462	30 x 60	217	FG474	
24 x 60	215	FG463		-		



op Size"	Wt. lbs.	Model No.	Top Size"	Wt. lbs.	Mode No.		
	VOOD FIL		SHOP TOP				
36 x 72	232	FG213	36 x 72	238	FG216		
86 x 60	220	FG212	-	-	-		
0 x 72	222	FG211	30 x 72	217	FG215		
0 x 60	204	FG210	30 x 60	200	FG214		
4 x 60	184	FG209	-	-	-		
AMINAT	ED WOOI)	PLASTIC	LAMINAT	Έ		
36 x 72	238	FG205	36 x 72	238	FG208		
6 x 60	217	FG204	-	-	-		
0 x 72	217	FG203	30 x 72	198	FG207		
0 x 60	200	FG202	30 x 60	184	FG206		
24 x 60	182	FG201	-	-	-		

MAXI-BENCH WORKSTATIONS

- Bring your workstation to your work
- · Features a sturdy 30" x 60" wood filled steel top and heavy duty all-welded 14-gauge steel frame mounted on 2 rigid, 2 swivel 5" phenolic casters (with brakes)
- Standard features: 42" high peg board panel, double drawers, swivel-out stool, lower shelf; end stops
- · Model FF068 (shown) includes fluorescent lamp, 25' incandescent drop light, 4-outlet power bar
- · Model FF069 does not include electrical fixtures or wiring
- Static benches (i.e. no casters) also available



FF068

Model Wt. **Overall** No. Description Height" lhs. FF068 Mobile, complete 435 FF069 Mobile, no Electrical 415 FF071 Static, complete 70 425 Static, no Electrical

72" LOUVERED BENCH RACK



- · All-welded louvered bench rack designed to be permanently installed on a 72" wide workbench
- Provides tool and storage for assembly or repair operations when combined
- with plastic parts bins • 72" W x 40" H
- Bench rack weight: 95 lbs

Model I	NO.		Description
CB364			Bench rack only
RAC	K/BIN (COMBI	INATIONS
Red	Blue	Yellow	Description
CB173	CB172	CB174	Rack w/144 bins,
	В	in Size:	7 3/8" L x 4 1/8" W x 3" H
CB176	CB175	CB177	Rack w/72 bins,
	В	in Size:	10 7/8" L x 5 1/2" W x 5" H
CB185	CB184	CB186	Rack w/36 bins,

36" LOUVERED **BENCH RACK**



- All-welded louvered bench rack is a self supporting workstation organizer
- May be placed on any flat surface near a worksite without the need for bolts or fasteners
- 35 3/4" W x 22" H
- · Bench rack weight: 22 lbs

Model N	No.		Description			
CB363			Bench rack only			
RACK/BIN COMBINATIONS						
Red	Blue	Yellow	Description			
CB146	CB145	CB147	Rack w/32 bins			
	В	in Size:	5 3/8" L x 4 1/8" W x 3" H			
CB152	CB151	CB153	Rack w/32 bins			
	В	in Size:	7 3/8" L x 4 1/8" W x 3" H			
CB155	CB154	CB156	Rack w/18 bins			
	В	in Size:	10 7/8" L x 5 1/2" W x 5" H			

HEAVY-DUTY MECHANIC'S CART

Model		Wt.
No.	Description	lbs.
FF497	Mechanic's Cart, complete	147
FF496	Mechanic's Cart, no bins	120

- · Rugged workstation on wheels
- 12-gauge arc-welded construction
- Combination rolling tool box and workbench ideal for plant maintenance, set-up, repair or production operations
- Standard features include: 1600 lbs. capacity 5" easy rolling casters w/toe brakes; tubular push handle; locking drawer; locking storage cabinet; 2" rim on three sides; 3 compartment middle shelf and 10 steel stackbins w/bin hangers
- Dimensions: 30" L x 20" D x 37 1/2" H



B61

INDUSTRIAL WORKBENCHES

EXTRA-HEAVY-DUTY WORKBENCHES

ALL WELDED BENCHES

- Most solid workbench available
- All-welded construction features a wood-filled 3/16" steel top with 11 gauge steel legs and stringers
- Mobile units come w/ 6" phenolic casters, 2 swivel w/ brakes, and 2 rigid
- Bolt-down footplates are standard
- Overall height is 34"
- Kleton Blue finish



Model		Dimensions					Cap.	Wt.	
No.	Style	W"	х	D"	х	H"	lbs.	lbs.	
FF494	Static	72	х	30	х	34	5000	290	
FF495	Static	72	Х	36	Х	34	5000	360	
FH465	Mobile	72	Х	30	Х	34	3500	290	
FH466	Mobile	72	Х	36	Х	34	3500	360	

Other sizes available on request

PEDESTAL BENCHES

- Designed for workshop applications
- Feature 1 3/4" thick solid laminated hardwood top, mounted on all-welded pedestals with 2 shelves
- Pedestals are 18" W x 24" D x 32" H
- Overall height: 34"
- · Colour: Kleton blue



Model		Dimensions					
No.	W"	Х	D"*	Х	Н"	lbs.	
FF120	60	Х	30	Х	34	158	
FF121	72	х	30	Х	34	175	
FF122	84	Х	30	Х	34	192	
FF119	120	Х	30	Х	34	245	

36" deep units and/or steel tops available upon request.

HEAVY-DUTY MACHINE STANDS

- Designed for use as machinery stand or work table when full-sized workbench is not necessary
- All-welded construction, 14 gauge steel lip-down shelves, with bolt-down footplates on 3/16" x 1 1/2" angle leg
- Colour: Kleton blue



Model		D	imens	ions		Cap.	Wt.
No.	W"	Х	D"	х	H"	lbs.	lbs.
FH268	30	Х	18	х	32	1000	60
FH269	36	Х	24	Х	32	1000	70
FH270	48	Х	24	Х	32	1000	85

ECONOMY GRADE OPEN WORKBENCHES

- Meet any strength requirement for light manufacturing, assembly operations, maintenance service etc.
- · Heavy gauge adjustable legs from 28" to 33",
- front and back electrical knockouts, 12" wide lower shelf
- Choose between 1" presswood top, or plastic top (1 1/2" grey laminated plastic surface) widely used in electronics, laboratories, and institutions
- · Optional drawer, Model FH271 can be added to all models

Model		D	ns	Wt.	
No.	Description	W"	х	D"	lbs.
FH213	1" presswood top	48	х	24	70
FH214	1" presswood top	60	Х	24	76
FH215	1" presswood top	72	Х	24	82
FH216	1" presswood top	60	Х	30	83
FH217	1" presswood top	72	Х	30	92
FF649	1 1/2" plastic top	48	Х	24	77
FF650	1 1/2" plastic top	60	Х	24	83
FF651	1 1/2" plastic top	72	Х	30	122
FH271	Optional drawer only	18	х	12	12





B62

INDUSTRIAL WORKBENCHES

CABINET WORKBENCHES

- Versatile all-welded cabinet workbench suited for any industrial application that requires work surface and secure tool and part storage
- 34" high, with cabinet itself measuring 30" W x 60" L
- Tops are available in steel wood core, laminated wood, plastic laminate or multi-laminated shop top versions, in 30" and 36" W, by 60" or 72" L
- Options include: cyclinder locks to prevent unauthorized access, extra drawers and shelves
- Components can be ordered individually
- · Cabinet colour is Kleton blue






CABINET FORMATS (NO TOPS)


	Wt.
Includes	lbs.
Shell (FH165), 1 shelf (FH164), door set (FH163)	160
Shell only	105
Shell (FH165), 4 drawers (FF369)	145
Shell (FH165), 1 shelf (FH164)	120
Shell (FH165), 1 shelf (FH164), 1 Drawer (FF369)	130
Shell (FH165), 1 shelf (FH164), 2 Drawers (FF369)	140
Shell (FH165), 2 shelves (FH164)	135
	Shell (FH165), 1 shelf (FH164), door set (FH163) Shell only Shell (FH165), 4 drawers (FF369) Shell (FH165), 1 shelf (FH164) Shell (FH165), 1 shelf (FH164), 1 Drawer (FF369) Shell (FH165), 1 shelf (FH164), 2 Drawers (FF369)

Standard Formats:












FH395 w/top







FH398 w/top

TOPS (ADD TO CABINET TO COMPLETE UNIT)

	O (ADD TO C	ADINE	0 00	WIII EETE C	,,,,,				
Top		Size: 30" x 60"		Size: 30" x 72"		Size: 36" x 60"		Size: 36" x 72"	
Type	Material	Model V	Vt. Ibs.	Model	Wt. Ibs.	Model	Wt. Ibs.	Model	Wt. Ibs.
SW	Steel/Wood	FD033 (grey)	88	FD034 (grey)	106	FD035 (grey)	108	FD036 (grey)	120
		FH183 (blue)	88	FH184 (blue)	106	FH185 (blue)	108	FH186 (blue)	120
LW	Laminated Wood	FD020	80	FD021	126	FD026	105	FD027	126
PL	Plastic Laminate	FD011	72	FD012	86	FD013	86	FD014	126
ST	Shop Top	FD004	88	FD005	105	FD006	105	FD007	126

ADD-ON COMPONENTS

Model		Wt.
No.	Description	lbs.
FH476	Camlock w/pair of keys	1
FH163	Door set, lock included	40
FH164	Extra shelf 27 3/4" x 58 3/4"	15
FF369	Extra drawer 18 1/2" x 20 1/2" x 7 1/2"	10

CABINET WORKBENCHES (COMPLETE UNIT - INCL. CABINET & TOP)

CABINET		STEEL/V	VOOD TOP)	L/	MINATED	WOOD TO	P	P	LASTIC LA	MINATE T	ОР		SHO	P TOP	
FORMAT	30 x 60	30 x 72	36 x 60	36 x 72	30 x 60	30 x 72	36 x 60	36 x 72	30 x 60	30 x 72	36 x 60	36 x 72	30 x 60	30 x 72	36 x 60	36 x 72
FH393	FH179	FH180	FH181	FH182	FH166	FH167	FH168	FH169	FH170	FH171	FH172	FH173	FH175	FH176	FH177	FH178
FH165	FH203	FH204	FH205	FH206	FH188	FH189	FH190	FH191	FH192	FH193	FH194	FH195	FH199	FH200	FH201	FH202
FH394	FH234	FH235	FH236	FH237	FH218	FH219	FH220	FH221	FH222	FH223	FH224	FH225	FH230	FH231	FH232	FH233
FH395	FH263	FH264	FH265	FH266	FH238	FH239	FH240	FH241	FH242	FH243	FH244	FH245	FH259	FH260	FH261	FH262
FH396	FH289	FH290	FH291	FH292	FH272	FH273	FH274	FH275	FH276	FH277	FH278	FH279	FH285	FH286	FH287	FH288
FH397	FH309	FH310	FH311	FH312	FH293	FH294	FH295	FH296	FH297	FH298	FH299	FH300	FH305	FH306	FH307	FH308
FH398	FH329	FH330	FH331	FH332	FH313	FH314	FH315	FH316	FH317	FH318	FH319	FH320	FH325	FH326	FH327	FH328

TOOL CARTS & MOBILE BENCHES

TOOL TOTER CARTS

For safe convenient storage of tools and equipment. An excellent addition to any tool centre

- Made for safe, convenient storage of tools and equipment
- Don't waste time looking for your tools and jigs
- Each drawer is 15 1/4" x 23 3/4" x 4 3/4" w/ padlocking hasp
- Carrier is 18" W x 24" D x 34 1/2" H with
- 2 1/2" hard rubber swivel casters
- Shipped knocked down

Model No.	Description	Wt. Ibs.
FH210	2 Drawers	55
FH211	4 Drawers	85
FH212	2 Drawers and cabinet	93







INDUSTRIAL DUTY **MOBILE SERVICE BENCHES**

Designed for moving heavy parts and tools to the job site. Provides a strong, maintenance free surface to work on.

16-gauge all-welded steel construction

- Laminated hardwood top
- 5" x 1 1/2" resilient non-marking swivel casters w/ brake
- 18" W x 21" D x 4" H drawers
- 42" W x 24" D x 37" H
- 1000 lbs. capacity
- Kleton blue finish
- No assembly required
- Locks not included







Model No.	Description	Wt. Ibs.
FF980	2 Doors	235
FF981	1 Drawer/1 Door	190
FF982	4 Drawers/1 Door	275
FF983	8 Drawers	300
FH475	Cam lock w/pair of keys for doors	.5
FH476	Cam lock w/pair of keys for drawers	1.0





CABINET TABLES

These sturdy combination storage cabinets and work tables provide safe locked-in storage of valuable tools and parts, while at the same time serving as all-around work tables. Ideal for mounting vises, grinders or small power tools. Heavy gauge steel. Cylinder lock built into handle on door for added security. Grey baked enamel finish.

ONE SHELF CABINET

- 24" x 24" work area with 2" lip
- Unit is 34" H
- One full size centre shelf adjustable on 1 3/4" centres
- 12 cu. ft. of storage space
- Weight: 80 lbs.
- Shipped knocked down

Model No. FF075

LOCKING CABINET TABLE

- 36" x 24" table top offers a large work area
- Unit is 34" H
- 2" deep lip prevents supplies from falling off
- Comes with one full-size centre shelf adjustable on 1 1/2" centres
- 18 cu.ft. of storage space
- Weight: 110 lbs.
- Shipped knocked down

Model No. FF076

THREE SHELF CABINET

- 15 1/2" D x 21" W work surface can be mounted to form a 2" deep tray, or reversed to provide a rimless work area
- 3 adjustable shelves
- 6.2 cu ft of storage space
- Unit is 34"H
- Weight: 46 lbs.
- Shipped knocked down

Model No. FF078







SERVICE BENCHES & CABINETS

KLETON MOBILE CABINET BENCHES

- Ideal for maintenance, repair and assembly departments
- Mount one, two or three cabinets from six choices of cabinets
- Featuring heavy-duty 11-gauge steel base, 1 1/4" thick laminated hardwood top, and push handle
- Equipped with four 5" roller bearing non-marking casters for smooth, easy rolling
- Two rigid and two swivel casters with brakes
- Keyed alike cam locks available
- All mounting hardware included and shipped knocked down
- Colour: Bases Kleton blue, cabinet frames Kleton light grey and drawers and doors Kleton blue


Configure your own unit by choosing:

- 1. The pedestal style(s) that suits your needs (to a maximum of 3 pedestals)
- 2. Add to that the assembly kit, whether it be single, double or triple. Assembly kit includes casters, base, and top.



Description	lbs.
ESTAL STYLES	
One door	51
Two half doors	52
Two large drawers	
and one half door	75
Four large drawers	97
Four small drawers and	
one half door	84
Four small drawers and	98
two large drawers	
	ESTAL STYLES One door Two half doors Two large drawers and one half door Four large drawers Four small drawers and one half door Four small drawers and

FH407	Single	35
FH408	Double	65
FH409	Triple	95
FH475	Cam lock for doors	1
FH476	Cam lock for drawers	1















FH467

FH471

FH468

FH472

FH470

KLETON MOBILE TOOL BENCHES

A VERSATILE UNIT COMBINING TOOL/STORAGE AREA WITH A WORK SURFACE

- Heavy-duty 11-gauge steel top and base
- Shelves made of 14-gauge steel with 1 1/2" lip
- Equipped with four 5" roller bearing non-marking casters for smooth, easy rolling
- Two rigid and two swivel casters with brakes
- Overall size: 60" W x 22" D x 37" H
- Capacity: 1000 lbs.
- Colour: Kleton blue

5-DRAWER CABINET:

- 1 drawer 22 1/8" W x 16 3/4" D x 2" H
- 2 drawers 22 1/8" W x 16 3/4" D x 4" H
- 2 drawers 22 1/8" W x 16 3/4" D x 6 1/8" H
- Colour: Red

Model	Unit	Wt.
No.	Description	lbs.
FF993	5 Drawers/3 Drawers	285
FF994	3 Drawers and side Shelves	220
FF995	5 Drawers and side Shelves	235



3-DRAWER CABINET & FLIPTOP PANEL

- 1 drawer 22 1/8" W x 16 3/4" D x 2" H 2 drawers 22 1/8" W x 16 3/4" D x 4" H
- 3 drawers 26 1/2" W x 18" D x 12 3/8" H
- Complete with locking bar Colour: Red

SINGLE PEDESTAL BENCH

INDUSTRIAL DUTY BENCHES

- Heavy gauge steel cabinet with 1" round tube frame
- Top tray with rubber mat
- Equipped with four 4" roller bearing non-marking casters for smooth easy rolling
- All swivel with brakes
- Full extension drawers' capacity: 100 lbs. per drawer
- 20" W x 21" D x 37" H
- 800-lb capacity
- Colour: Kleton blue and Kleton light grey
- Keyed alike cam locks available
- No assembly required



Model	Unit	Wt.
No.	Description	lbs.
FF984	4-Drawer cabinet	98
MH801	Single door cabinet	80
FH475	Cam lock for door	1
FH476	Cam lock for drawers	1



STEP STOOLS, STANDS & LADDERS

STEP STOOLS

KIK-STEP

- · Extra heavy-duty steel
- · Comes with a double platform with non-slip rubber tread
- Spring-loaded casters retract under slight pressure, forcing base to the floor
- 11" diameter upper platform and 13 1/2" diameter lower platform
- 15 5/8" diameter base has an all-around protective bumper
- 14" overall height
- Wt. 10 lbs. Colour: Black

Model No. OC664





STEP STOOL

- Tough one piece poly construction with anti-skid bottom
- Threaded top and expanded step
- 16" diameter base provides added stability
- Glides easily on retractable rubber casters
- 13" overall height
- Capacity: 300 lbs.
- Wt. 7 lbs.

OA300



Rubbermaid	
------------	--

Model No.	Mfg. No.	Colour
OA299	2523BL	Black
OA300	2523BE	Beige

FOLDABLE STEP-STOOL

- Slip resistant surfaces on steps and foot pads
- Stands upright when folded and requires minimum space for storage
- Easy to clean and resistant
- to dents and rust Capacity: 300 lbs.

Model No. MH866





LOAD STANDS

- · Safety yellow high density, high molecular weight polyethylene
- Non-skid abrasive tape on top surface
- · Non-corrosive and non-conductive
- Chemical resistant
- · Durable and lightweight
- · Good in low temperature environments
- · Capacity: Dynamic load: 500 lbs Static load: 1000 lbs.

LOAD/UNLOAD STAND

· Dimensions:

· Weight: 20 lbs.



STANDARD SINGLE-STEP LOAD STAND

· Dimensions:

25" W x 23 1/2" D x 15" H
• Weight: 10 lbs.

WORK STEP STAND

35" W x 35" L x 16" H

Model No. MF604

Dimensions:

Weight: 20 lbs.

Model No. MH081



TWO-STEP STAND

• Dimensions: 26 1/2" W x 33" L x 25" H

· Weight: 15 lbs.

Model No. MH080



32 1/2" W x 26" D x 20" H

Model No. MF605




STEP STANDS

- Rugged all welded construction
- Rolling stands come with spring-loaded casters Dimensions: 16" D x 12" H
- Capacity: 300 lbs.
- Colour: Kleton blue

PLATFORM STANDS

		_
Model No.	Width"	Wt. Ibs.
MH228	20	11
MH229	24	13
MH230	32	16

Model No.	Width"	Wt. Ibs			
MH225	20	17			
MH226	24	19			
MH227	32	22			








LIGHT-DUTY PLATFORM STANDS


- · Tubular aluminum framing; hand rail for climbing
- · Ideal for 8' ceilings
- Model No. MA619 comes with pail/rag holder, tool holder
- Folds to 3 1/2" wide
- · Non-marring rubber feet resist movement
- · Capacity: 200 lbs.

Model	Overall	Platform	Wt.
No.	Height"	Height"	lbs.
MA618	46	22	6
MA619	54	22	8





ALUMINUM LADDERS

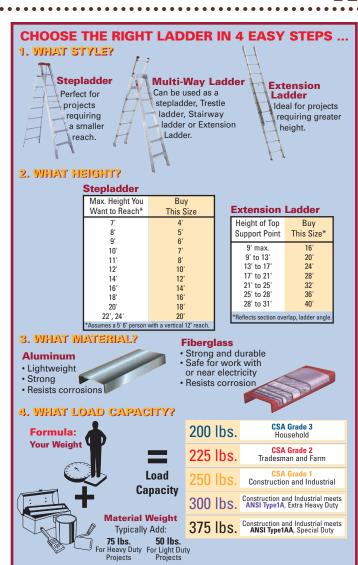

STEPSTOOL/LADDERS

(360 SERIES)

CSA Certified Grade 3 - 200 lbs. Load Rating

- · Ideal for light duty usage
- easy to open, carry and store
- · Both front and rear legs are braced · Solid aluminum rivets in front
- prevent steps from loosening
- · Slip resistant vinyl feet

Model		Base		Wt.
No.	Height'	Width"	Spread"	lbs.
MF472	2	15 1/2	17 1/2	5
MF473	3	17	24	6



ALUMINUM LADDER REPLACEMENT PARTS/ACCESSORIES









Model No.	Description	Applicable Series (Bon L)
MF507	Ladder Feet (set of 4)	360
MD496	Ladder Feet (set of 2)	600(F), 800(F),1400(F&R)
MD497	Ladder Feet (set of 2)	600(R), 800(R)
MD498	Ladder Feet (set of 2)	7700



INDUSTRIAL LADDERS


CSA CERTIFIED GRADE 1 - 250 LBS. LOAD RATING ANSI APPROVED TYPE 1A - 300 LBS. LOAD RATING

INDUSTRIAL STEPLADDERS (800 SERIES)

- Serrated, slip resistant steps
- Serrated, slip resistant steps
 Heavy gauge, deep ribbed aluminum side rails
 11" x 9" pail shelf and tool holder top
 Additional bracing on rear rails every 12"
 High strength aluminum spreader bars

- Three piece spreader bars on Models MA697 to MA700 inclusive Rear rails reinforced vertically on Models MA699 and MA700

Model No.	Nominal Height'	Base Width"	Spread"	Wt.lbs.
MA691	4	19 3/4	29 1/4	13
MA692	5	21 3/16	35 5/8	17
MA693	6	22 11/16	41 3/4	19
MA694	8	25 3/4	53 5/16	25
MA695	10	28 5/8	64 3/4	32
MA696	12	31 3/4	76 3/8	40
MA697	14	34 11/16	91	50
MA698	16	37 5/8	100 9/16	60
MA699	18	40 5/8	113	81
MA700	20	43 3/16	124 1/2	98



PLATFORM LADDERS (600 SERIES)

- Slip resistant steps, solid working platform for prolonged standing at one height
- Sturdy hand rails on models over 4' Platform is 14" W x 16" L
- Folds compactly for easy storage
- Rear rails reinforced vertically on Models MA657 and MA658
- Available with (4) retractable casters for easy mobility



MH707

MA693

						- 4	8
Mode		Nominal	Overall	Platform	Width"	Caraadii	Wt.
w/o casters	w/casters	Height'	Height"*	Height"	vviutii	Spread"	IDS.
MH707	MF938	4	47 1/4	23 3/8	21 1/8	28 7/16	17
MA652	MF939	6	70	46 5/16	24 1/4	41	22
MA653	MF940	8	92 15/16	69 1/4	27 1/4	53	28
MA654	MF941	10	114 7/8	92 3/8	30 1/8	64 1/2	36
MA655	MF942	12	138 9/16	115 1/8	33 3/16	76 3/16	44
MA656	MF943	14	161 1/2	138 1/16	36 1/8	90	53
MA657	MF944	16	189 5/16	165 1/2	39 3/16	100 5/16	63
MA658	MF945	18	212	189 3/4	42 3/16	113 5/16	85

Note: 4' ladders come without handrails. All other sizes come with handrails

SINGLE & EXTENSION LADDERS (7700 SERIES)

- · Heavy-duty "I" beam siderails give maximum strength with minimum weight
- Sturdy vinyl coated extruded aluminum end
- caps protect ladder and prevent marring of walls Extra wide, deeply serrated, *Traction-Tred*®
- flat top rungs for standing comfort
- Pivoting aluminum shoes with triple riveted, deep ridged PVC treads; ice pick feet for use on mud and snow
- Heavy-duty steel pulley brackets on extension ladders; 5/16" dia. monofilament rot-proof polypropylene rope

Model No.	Nominal Length'	Width"	Wt.lbs.
SINGLE LADDERS			
MA675	8	17	15
MA676	10	17	18
MA677	12	17	20
MA678	14	17	23
MA679	16	17	30
MA681	18	17	33
MA683	20	17	49

Model No.	Nominal Length'	WorkingLength'	Width"	Wt.lbs
EXTENSION	LADDERS - 2 SECTION	ONS		
MA680	16	12 1/2	18 7/8	30
MA682	20	16 1/2	18 7/8	36
MA685	24	20 1/2	18 7/8	43
MA686	28	24 1/2	18 7/8	50
MA687	32	28 1/2	20 5/16	64
MA688	36	32 1/2	20 5/16	71
MA689	40	35 1/2	20 5/8	101

TRESTLE STEPLADDERS (1400 SERIES)

- Designed for entry on both sides
- Ideal for jobs more easily done by two people
- Solid aluminum construction, extruded channel-type side rails
- Heavy-duty spreader bars
- Serrated, slip resistant steps on both sides Solid aluminum rivets assure rock free joints

Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs	
MA608	6	22 3/4	49 7/8	23	
MA609	8	25 3/4	63 7/8	30	
MA610	10	28 9/16	78	40	

ALUMINUM & FIBREGLASS LADDERS

STEPLADDERS

EXTRA HEAVY-DUTY (6900 SERIES)

CSA Certified Grade 1- 250 lbs. Load Rating ANSI Approved Type 1A - 300 lbs. Load Rating

- · Durable non-conductive C channel side
- rails in high visibility safety yellow Slip-resistant serrated aluminum steps
- Heavy-duty rubber safety shoes
- Also comes with a tough moulded copolymer top and J style spreader arms



FEATHERLITE

Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MF606	3	19	23	12
MF607	4	20	28	15
MF608	5	21	34	18
MF609	6	23	39	21
MF610	7	24	44	24
MF611	8	25	50	28
MF612	10	28	61	35
MF613	12	31	74	42

PLATFORM STEPLADDERS (6500 SERIES)

- · Ideal for all types of fixed height work
- · Durable non-conductive C channel side rails in high visibility safety yellow
- Slip resistant serrated aluminum steps and platform
- Features a platform size of 14" x 18", J style spreader arms and heavy-duty rubber safety shoes



Model No.	Nominal Height'	Platform Height"	Base Width"	Spread"	Wt. Ibs.
MF411	6	46	24	42	25
MF412	8	68	28	54	33
MF413	10	92	31	67	41

EXTRA HEAVY-DUTY STEP LADDERS(6400 SERIES)

CSA Certified Grade 1 - 250 lbs. Load Rating ANSI Approved Type 1A - 300 lbs. Load Rating

- Durable non-conductive C channel side rails in high visibility safety yellow
- Slip-resistant serrated aluminum steps
- Heavy-duty rubber safety shoes
- · Also comes with a tough moulded copolymer top and J style spreader arms

Model	Nominal	Base		Wt.
No.	Height'	Width"	Spread"	lbs.
MD487	3	17	23	12
MD488	4	18	28	16
MD489	5	20	34	19
MD490	6	21	43	22
MD491	8	23	55	30
MD492	10	26	68	36
MD493	12	28	79	45



FEATHERLITE

THE "BRUTE" STEPLADDERS (6800 SERIES)

CSA Certified Grade 1- 250 lbs. Load Rating ANSI Approved Type 1A - 300 lbs. Load Rating

- Designed for the most demanding industrial applications
- Durable non-conductive C channel side rails in high visibility safety yellow
- Features slip-resistant serrated aluminum steps
- · Tough moulded copolymer top
- · Inside spreader arms, heavy-duty rubber safety shoes and unique solid triangular step braces for extra durability

Model	Nominal	Base		Wt.
No.	Height'	Width"	Spread"	lbs.
MF561	4	18	31	18
MF562	6	21	43	24
MF563	8	23	55	33
MF564	10	26	67	39
MF565	12	28	78	50



ALUMINUM **LADDERS & STEPLADDERS**

INDUSTRIAL STEPLADDERS (4400 SERIES)

CSA Certified Grade 1 - 250 lbs. Load Rating ANSI Approved Type 1A - 300 lbs. Load Rating

- · 3 1/2" serrated steps and side rails
- Solid triangular step braces
- Copolymer top and pail tray
- Rubber safety shoes

FEATHERLITE

Model	Nominal	Base		Wt.
No.	Height'	Width"	Spread"	lbs
MA640	4	20	29	14
MA641	6	23	41	20
MA642	8	26	54	26
MA643	10	29	66	33
MA644	12	32	78	41
MA645	14	35	88	51
MA646	16	38	102	59



TWO-WAY STEPLADDERS (6600 SERIES) 🔎 FEATHERLITE

CSA Certified Grade 1- 250 lbs. Load Rating ANSI Approved Type 1A - 300 lbs. Load Rating

- · Double front construction allows access from either side
- · Durable non-conductive C channel side rails in high visibility safety yellow
- Extra thick top brackets for greater stability
- · Slip resistant serrated aluminum steps, J style spreader arms and heavy-duty rubber safety shoe

Model No.	Nominal Height'	Base Width"	Spread"	Wt. Ibs.
MF414	6	21	60	26
MF415	8	23	75	36
MF416	10	29	92	92



FEATHERLITE

REPLACEMENT *PARTS/ACCESSORIES*



Model No.	Description	Applicable Series
MF436	Step Ladder Safety Feet - 4/kit	6400, 6500
MF437	Step Ladder Safety Feet - 4/kit	6600
MF439	Copolymer Top	6400, 6800, 6900
MF441	Extension and Straight Ladder Safety Feet (Standard 1 piece assembly)	6100, 6200
MF442	Extension and Straight Ladder Safety Feet (Optional duo feet) - 2/kit	6100, 6200
MF445	Extension Ladder End Caps - 4/kit	6100, 6200
MF447	Single Cable Hook	6100, 6200
MF450	Pole Strap	6200









Model No.	Description	Applicable Series
MF434	Step Ladder Safety Feet - 4/kit	4400, 4500
MF438	Pail Tray	4400
MF439	Copolymer Top	4400

19599F B68

FIBREGLASS LADDERS

EXTRA HEAVY-DUTY LADDERS

STEPLADDER (7300 AND 7400 SERIES)

Non-conductive fibreglass construction. Both series have a rugged aluminum heavy gauge Tool-Tra-Top®

ANSI Approved Type 1AA - 375 lbs. Load Rating. Special Duty/Professional Use

- · Reinforced steps 100% braced and triple riveted for enhanced sturdiness
- The EDGE™ (Energy Diffusing Geometry) bracing system is stronger/more resistant to damage
- · Violator stripes on rails make ladder more visible

7400 Series

CSA Certified Grade 1 - 250 lbs. Load ANSI Approved Type 1AA - 375 lbs. Rating

- Tops have massive 3/16" thick side plates
- 4 solid 1/4" aluminum rivets attach top to each front rail
- Extruded rubber slip-resistant feet
- Traction-Tred® aluminum steps and rear horizontals are knee-braced with triple rivet pattern to resist splitting abuse

PLATFORM LADDERS (P7400 SERIES)


CSA Certified Grade 1- 250 lbs. Load Rating ANSI Approved Type 1AA - 375 lbs. Load Rating

- · Non-conductive fibreglass construction
- · Solid 200 sq.in. aluminum working platform for prolonged standing
- 2' high hand rails
- · Serrated steps and platform
- · Heavy duty 1 1/4" spreader bars on 8 to 12 step models

Model No.	Nominal Height'	Platform Height'	Base Width"	Spread"	Wt. Ibs.
MA784	5	3	23	37	21
MA785	6	4	24	43	25
MA786	8	6	28	55	33
MA787	10	8	31	67	44
MA788	12	10	35	80	55

Model Nominal Wt. Base No. Height' Width" Spread" lbs. 7300 SERIES - SPECIAL DUTY YELLOW MH249 14 19 1/8 23 1/2 17 21 7/8 22 5/8 24 3/8 20 23.5 MH244 35 7/8 MH245 42 MH246 54 3/4 MH247 10

141112-17	10	00 0/0	00 0/0	14
MH248	12	34 7/8	79	52
7400 SE	RIES -EXT	RA HEAVY-D	UTY ORAI	NGE
MA667	4	21	30	17
MA668	5	23	37	21
MA669	6	24	43	25
MA670	7	26	49	29
MA671	8	28	55	33
MA672	10	32	67	43
MA673	12	35	80	53



INDUSTRIAL STEPLADDERS (6250 SERIES)

CSA Certified Grade 1 - 250 lbs. Load Rating ANSI Approved Type 1A - 300 lbs. Load Rating

- · Non-conductive fibreglass construction
- · Ideal for electrical, maintenance and painting jobs also general use
- 3

Plastic 3" alur	s BLIV			
odel	Nominal	Base		Wt.
).	Height'	Width"	Spread"	lbs.
A710	4	20	29	13
				4.0

Model	Nominal	Base		Wt.
No.	Height'	Width"	Spread"	lbs.
MA710	4	20	29	13
MA712	6	23	41	19
MA713	8	27	53	26

SINGLE LADDERS (7100 SERIES)

CSA Certified Grade 1 - 250 lbs. Load Rating ANSI Approved Type 1AA - 375 lbs. Load Rating

- Round rung with 3 1/4" interlocking side rails
- · Aluminum rail shield and shoe bracket guards against abusive damage
- · Aluminum shoe with steel ice pick plate

Model No.	Nominal Length'	Wt. Ibs.
MF455	8	20
MF456	10	25
MF457	12	28
MF458	14	32
MF459	16	38



TWIN-STEP DOUBLE STEPLADDERS (T6000 SERIES)

CSA Certified Grade 1 - 250 lbs. Load Rating ANSI Approved Type 1A - 300 lbs. Load Rating

- · Use in electrical, maintenance, painting as well as general contractor applications
- · Designed for 2 person use (1 person on each side only - 250 lbs. capacity per side)
- Non-conductive capabilities and a colourful combination of rugged construction and outstanding economy
- · Features heavy gauge all aluminum extruded top
- 13" x 8 1/4" and 4 solid 1/4" aluminum rivets that attach top to front rails on each side
- Back-up aluminum plate reinforces all top connections
 Pinch-Proof™ solid external steel plated spreaders
- Traction-Tread® 3" deeply serrated aluminum steps · Plated steel, double knee bracing on bottom
- step triple riveted front and back
- Heavy-duty extruded rubber slip resistant feet, shielded fibreglass rail ends

Model No.	Nominal Height'	Base Width"	Spread"	Wt. Ibs.
MF532	4	19	36 1/8	18
MF534	6	22	50 1/8	25
MF535	8	25	64 1/8	35

EXTENSION LADDERS (D6000-2 SERIES) CSA Certified Grade 1 - 250 lbs. Load Rating

ANSI Approved Type 1 - 250 lbs. Load Rating

- Non-conductive blue fibreglass flat D-rung
- External guides on top of base section and internal guides on bottom of fly section securely interlock rails
- 3 3/8" side rails equipped with non-irritating fabric outer mat assure a smooth trouble-free surface even after weathering Direct rung to rail connections with exclusive
- Alflo® rung joints making it Twist-Proof
- Heavy-duty aluminum extruded pulley with 5/16" blue and yellow polypropylene rope
- Unique extruded aluminum rope clamp ties rope to rung

Model No.	Nominal Length'	Working Length'	Wt. Ibs.
MF451	16	13	33
MF452	20	17	40
MF453	24	21	47
MF454	28	25	56



FIBREGLASS LADDER REPLACEMENT PARTS/ACCESSORIES

Model No.	Description	Applicable Series (Bon L)				
MF514	Safety Feet (set of 4)	T7400				
MD494	Safety Feet (set of 4)	7200, 7400, 6250, P7400				
MF515	Safety Shoes	D6000-2, 7100 (Single)				
MF524	Adjustable Pole Strap Kit	7100-1				
MF525	Adjustable Pole Strap Kit	7100-2 7707 AT				
MF526	Cable Hook Kit (2 Hooks)	7100-1, 7100-2				
MF528	Moulded Pail Shelf Kit	6250				
MF529	Moulded Pail Shelf Kit	7400				









MF529

B69

LADDERS & WORK PLATFORMS

ALUMINUM ROLLING LADDERS

- · Widely used in hospitals, banks, offices, pharmaceutical and food processing applications · Corrosion resistant, easy to clean and non-magnetic
- · Slip-resistant steps · 4 spring-loaded swivel casters retract under the
- operators weight, rubber-tipped feet drop down · All welded and come with unpainted
- aluminum mill finish Structural framework is 1/2" schedule 40 high strength aluminum tubing
- 300 lbs. load rating







# of Steps	Platform Height"	Overall Height"	Base Depth"	Model No. 20" W Base 18" W Steps	Wt. Ibs.	Model No. 30" W Base 24" W Steps	Wt. Ibs.
VVIII	H TUOL	ANDKA	IIL5				
2	19	-	19	MA702	15	MF599	22
3	28 1/2	-	25	MA703	20	MF600	28
4	38	-	31	MA705	29	MF601	35
WITH	1 30" H	ANDRA	ILS				
3	28 1/2	58 1/2	25	MA704	27	MF602	34
4	38	68	31	MA706	34	MF603	41
5	47 1/2	77 1/2	37	-	-	MA707	49
6	57	87	43	-	-	MA708	60
7	66 1/2	96 1/2	49	-	-	MA709	67

LOCK-N-STOCK LADDERS

- · Climb it, roll it, fold it, store it
- 58 degree slope, 7" deep steps for easy climbing
- · Perforated step

• Bt

- Welded construction
- · Easy to maneuver
- · Locks in the folded or climbing positions

pproximately 10" deep when to	lded for easy storage
laximum capacity: 350 lbs.	-
uilt to ANSI 14.2 standards	
	a 11 are
	GAFETY LADDERS
	1/11/

Model No.	No. of Steps	Top Step Height"		en Wi Lengt			-	Folde nensi			Weight Lbs.
MH868	2	20	24	Х	17	10	Х	24	Х	41	30
MH869	3	30	24	Х	23	10	Х	24	Х	52	35
MH870	4	40	24	Х	30	10	Х	24	Х	65	42

STOP-STEP LADDERS

- · Stops still when you step on it
- Gives 18" to 54" of firm footing
- 1" square high tensile aluminum struts, frames and braces
- Heavy gauge extruded aluminum 16" x 8" cross steps with 9" raise
- Long lasting 1 5/8" retractable casters allow rubber base cups to grip floor
- 10 year limited warranty · Download rating: 300 lbs.
- · Colour: Beige
- Shipped knocked down
- OSHA compliant

Ompp	oa kiiookoa	aoviii				
Model	Number	Top Step				
No.	of steps	Height"				
CTOD CTED						


Model	Number	Top Step	0ve	erall	Dimens	ions	S	Wt.
No.	of steps	Height"	W"	Х	D"	х	H"	lbs
STOP-S	STEP							
MD623	2	18	21	Х	19 3/4	Х	22 3/4	16
MD624	3	27	21	Х	26 3/4	Х	31 3/4	22
MD625	4	36	22 3/4	Х	33 1/2	Х	40 3/4	34
STOP-S	STEP W/D	DUBLE HAND	RAIL					
MD626	3	27	21	Х	26 3/4	Х	56 1/2	32
MD627	4	36	23 3/4	Х	33 1/2	Х	65 1/2	39
MD628	5	45	25 1/4	Х	40 1/2	Х	74 1/2	50
MD629	6	54	26 1/4	Y	47 1/4	Y	83 1/2	64



SAWHORSES

- Heavy-duty aluminum construction ensures stable work platform
- Slip-resistant feet
- Sold individually
- · Maximum load of 1,000 lbs. per step







PORTABLE WORK PLATFORM

- · Designed for lighter-duty maintenance work
- Painted, slip-resistant work surface measures approximately 10 square feet

 • Legs fold-away for easy transport
- Overall dimensions 60" L x 21" W x 21" H
- · Weight: 27 lbs.
- · Maximum load capacity of 75 lbs./sq.ft.

Model No. MB121





B70

ROLLING LADDERS

MECHANICS/MAINTENANCE ROLLING LADDERS

- · Double-straddle base puts worker in close proximity for hard-to-reach jobs
- · Tilt and roll wheelbarrow mobility allows easy movement over rough surfaces
- Oversize 24" D x 24" W top step for easier worker movement
- Removable 10" D x 24" W tool tray fits on front or side railing
- · 300 lbs. load rating
- Kleton Blue enamel finish



MH214

MH215



Model	Number	Platform	Overall	Base
No.	of Steps	Height"	Height"	W" x D"
MH212	3	28 1/2	58 1/2	25 x 44
MH213	4	38	68	25 x 50

47 1/2

57

TILT-N-ROLL LADDERS

- Balanced design allows ladder to tilt into the rolling position
- · Ladder moves easily two 4" casters
- · One piece all welded steel construction
- · Legs have reinforced rubber tips that hold ladder secure during use
- Oversize 24" W x 24" D top step allows worker more freedom/movement and comfort
- · 30" high rails with 24" wide expanded metal steps 300 lbs load rating

• Kletor	Blue enar	mel finish		Į	M		ION
Model	Number	Platform	0A	E	Base	9	Wt.
No.	of Steps	Height"	Height"	W"	Х	D"	lbs.
MD603	3	27	57	25	Х	44	70
MD604	4	38	68	25	Х	50	81
MD605	5	47	77	25	Х	56	93
MD606	6	56	86	25	Х	62	105
MH242		Opt	tional tool ti	ray			9



ROLLING STEP STANDS

- For use in record storage rooms, offices and warehouses
- · Rolls into position and locks firms to the floor
- · Casters retract under operator's weight
- · Rubber tipped feet drop down
- · Capacity: 300 lbs

Wt.

lbs. 85 98

112

125

	•			u	-	0 000
Model	Number	Platform	Е	Bas	е	Wt.
No.	of Steps	Height"	W"	х	D"	lbs.
XX001	3	28	20	Х	30	40
XX002	4	37	20	Х	41	46



ROLLING SAFETY LADDERS

77 1/2

87





25 x 62

Certified as per **ANSI A14.7**

Note: Ladders are not to be used as work platforms.



MA613



KI ETON



- · Ideal wherever there is a need to reach bulky materials
- · Roll easily into position and lock firmly to the floor for maximum safety
- 2 to 6 step ladders operate on spring-loaded casters
- Casters retract under operator's weight, rubber feet drop down
- First step on all 8 to 16 step ladders activates the floor locking mechanism (step off and kick release to make the ladder mobile)
- · Non-clogging slip-resistant steel steps
- Frame is rugged welded 1" round steel tubing
- 8 to 16 step ladders shipped knocked down, easily assembled

Number	Model	Platform	Overall	Platform	Base	Wt.
of Steps	No.	Height"	Height"	Size"	W" x D"	lbs.
WITHOUT	HANDRAILS					
2	MA612	19	19	22 x 16	24 x 26	32
3	MA613	28	28	22 x 16	24 x 30	42
4	MH279	37	37	22 x 16	24 x 37	52
5	MA615	46	46	22 x 16	24 x 41	61
WITH HAN	IDRAILS					
4	MA614*	37	78	22 x 16	30 x 36	78
5	MA616*	46	87	22 x 16	30 x 46	89
6	MA617*	55	95	22 x 16	30 x 51	100
8	MA622	72	113	30 x 16	38 x 60	180
10	MA623	89	130	30 x 16	38 x 72	230
12	MA624	109	149	30 x 16	38 x 80	250
14	MA625	128	167	30 x 16	38 x 93	275
16	MA626	144	185	30 x 16	38 x 104	305

^{*} Only front casters are spring loaded

WORK PLATFORMS & SCAFFOLDING

HIGH WORK MAINTENANCE PLATFORMS

- · Convert forklift truck into safe, efficient work platform
- Take care of overhead maintenance problems without setting up ladders or scaffolds
- · Non-skid platform
- 72" safety mesh backscreen keeps operator and equipment away from lift mechanism
- Forks slip easily into pockets then attach safety chains
- Load capacity: 600 lbs
- · No assembly required

NOTE:

Kleton Maintenance Platforms meet or exceed ASME B56.1 safety standard when a safety harness and lanyard are worn.



Model No.	Description	Wt. Ibs.
MD444	High Work Platform - 36" x 36" platform	230
MH800	High Work Platform - 48" x 48" platform	300
MD338	Optional 6" caster kit	10
MD948*	Light Bulb Caddy 15" W x 15" D x 43" H	25

* Mounts on Models MD444 and MH800.

TITAN CONTRACTOR'S HARNESSES

- · Lightweight durable polyester webbing
- Meets CSA, OSHA and ANSI standards
- · Classified for fall arresting and/or working positioning

TITAN SHOCK *ABSORBING LANYARD*

· Lighweight, durable polyester webbing in 6' and locking snap hook



SN065

EMERGENCY STOP SWITCH

- Safety kill switch for person on work platform
- Will cut power to forklift in case of an emergency
- Consists of control box for platform, plug-in box (to be installed on forklift), and wire that extends 6' to 20'
- Switch is easy to install
- Recommended for maintenance platform model MD444 and MH800

Model No.	Description
MD328	Emergency Stop Switch
SN065*	Harness w/Buckles, Side D-Ring
SN067*	Harness w/Grommet, Side D-Ring
SN069	6' Built-in core shock-absorber, One leg

* Other harnesses available on page B196



MOVABLE SCAFFOLDING

A. ROLLING SCAFFOLD

- · Adjustable every 4" with maximum platform height of 6'
- Allows workers to safely reach variety of heights
- Compact can pass through standard doorways and down narrow aisles
- 5" swivel casters with brakes
- Overall dimensions: 6' W x 28" D x 6' H
- 700 lbs. static capacity
- Shipped knocked down

B. MINI-MOBILE SCAFFOLD

- Sturdy, lightweight, easy to assemble and take down, compact for storage
- Adjustable platform height up to 4'
- Steel frame: two 9 5/8" x 45" steel platforms
- Frame is painted w/ polyester powder coating
- 4" swivel casters with brakes
- Comes with utility shelf: 23 1/2" x 8 1/2", 3/4" lip and holes for tools
- Overall dimensions: 45 1/2" W x 22" D x 50" H
- 500 lbs. static capacity
- Shipped knocked down

	Model No.	Description	Wt. Ibs.
A.	MB035	Rolling Scaffold	150
B.	MB090	Mini-Mobile	51
C.	MB086	Maxi-Fold	129
	MB087	3' Vertical Extension	40
	MB088	6' Vertical Extension	49

C. MAXI-FOLD SCAFFOLD

- · Foldable scaffold has platform thay adjusts on 4" increments
- One piece frame assembly, three 8 1/8" x 75" steel platforms and four 5" casters with brakes
- Overall dimensions: 75 1/2" W x 29" D x 78" H
- Vertical extensions available
- Frame is painted using a polyester powder coating
- 700 lbs. static capacity
- Shipped knocked down



FORTRUSS® STEEL ROLLING TOWER SCAFFOLD (SS SERIES)

The scaffolds include guard-rail system which are easily assembled or adjusted by just SPECIFICATIONS: one person. Fortruss® may be stacked, utilizing up to 3 units to a maximum of 15'. Outriggers are required when stacking over 6'.

- · Pistol grip for easy one-man height adjustment
- Caster stem snaps into frame securely with no chance of caster drop-out
- Expanded end frame tube ends with locking tab making it easy to lock stacked sections or casters into place
- Tightening 'L' knob for better connection between
- truss and end frame increases stability Dual-lock casters are 5" x 1 3/8"
- Rectangular steel tubing end frame with round rungs
- Exterior grade plywood platform: 5/8" thick x 29" W x 65 3/8"L or 89 3/8"L

Model No.	Size L' x H'	End Frames	Truss Assembly	No. Plywood Platform(s)	No. of Casters	Wt. Ibs.
MF424	6 x 3	2 x 3'	2 x 6'	1	-	112
MF425	8 x 3	2 x 3'	2 x 8'	1	-	127
MF426	6 x 6	2 x 6'	2 x 6'	1	4	154
MF427	8 x 6	2 x 6'	2 x 8'	1	4	171
MF428	6 x 12	4 x 6'	4 x 6'	2	8	418
MF429	8 x 12	4 x 8'	4 x 8'	2	8	463
MF430	6 x 15	4 x 6', 2 x 3'	6 x 6'	3	8	530
MF431	8 x 15	4 x 6', 2 x 3'	6 x 8'	3	8	590

- full height unit 29" W x 68" H (w/o casters) - half unit 29" W x 39" H (w/o casters) **End frames**

Width (assembled) - 29 1/2" (w/o casters)

Platform height max. (w/casters) 6' unit: 6' 3"

12' unit: 11' 8" 15' unit: 14' 10"

6' L unit: 655 lbs. (50 lbs./sq. ft.)
8' L unit: 450 lbs. (25 lbs./sq. ft.) Load capacity

Please Note: Do not stack higher than 3 units totalling 15'. Each set of end frames requires one pair of trusses

and platform (incl. w/shipment). Outrigger kit and guard-rail/toeboard kit shipped with unit when platform is more than 10' above floor surface.



